

Yo-Yo Variants


Kirk T. McDonald

Joseph Henry Laboratories, Princeton University, Princeton, NJ 08544

(November 25, 2014; updated December 25, 2014)

1 Problem

In the classic yo-yo problem a spool of mass m , radius r_0 , and moment of inertia $I = kmr_0^2$ about its axis has a massless, infinitely thin string wrapped around the radius r_0 , with one end of the string fixed to a support above the spool, as shown in the left figure below.

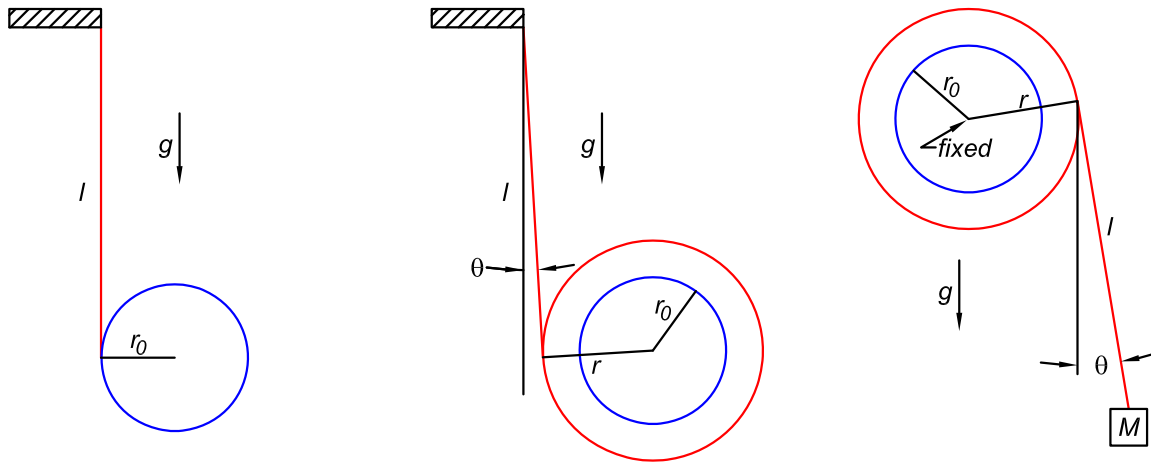

Consider also the case that the string is a tape of length L , thickness t and mass per unit length ρ , with either the end of the tape fixed as in the middle figure above, or with the axis of the spool fixed and mass M attached to the end of the tape.

Discuss the motion in all three cases, assuming that the length l of the unwound portion of the string/tape is initially zero.

2 Solution

2.1 Massless String

The vertical speed v of the center of mass of the spool is related to its angular velocity ω by $v = \dot{l} = \omega r_0$. Hence, the (constant) energy of the yo-yo, which starts from rest with $l = 0$ at time $t = 0$, is, in the approximation that the string is vertical,

$$E = 0 = \frac{mv^2}{2} + \frac{I\omega^2}{2} - mgl = \frac{m(1+k)\dot{l}^2}{2} - mgl. \quad (1)$$

Thus,

$$\dot{l}^2 = \frac{2gl}{1+k}, \quad \ddot{l} = \frac{g}{1+k}, \quad l = \frac{gt^2}{2(1+k)}. \quad (2)$$

For the case of a solid cylinder of radius r_0 , $k = 1/2$, $\ddot{l} = 2g/3$ and $l = gt^2/3$. For a yo-yo in the form of a solid cylinder of radius $r = nr_0$, $k = n^2/2$ and $l = gt^2/(n^2 + 2)$.

July 23, 2022. As the string unwinds from the spool, the tension in the string is related by $m\ddot{l} = mg - T$, and $T = m(g - \ddot{l}) = mgk/(1 + k) < mg$, where the acceleration \ddot{l} is downward. To the upper support of the string, the spool appears to have lost mass/weight as it falls.

When the string becomes completely unwound from the spool, an upward impulse in the string stops its downward motion, while angular momentum is conserved about the point of attachment of the string to the spool. In the approximation that energy is conserved during the impulse, afterwards the spool rises upwards with velocity $\dot{l} = -\sqrt{2gl/(1 + k)}$, and its acceleration is again given by eq. (2). The tension in the string is again $T = mgk/(1 + k) < mg$, and the spool again appears to have lost weight (although it is now rising).

When the velocity reaches zero, the spool reverses direction, and the cycle repeats.

This behavior is discussed in the video <https://www.youtube.com/watch?v=pwx12kwg0AM>.

2.2 Yo-Yo with Massive Tape

We next consider a yo-yo suspended by a tape, rather than a string, of length L , thickness t , linear mass density ρ and mass $m_t = \rho L$. When length l of the tape has been unwound, the remaining tape on the yo-yo has area $(L - l)t = \pi(r^2 - r_0^2)$, where,

$$r = \sqrt{\frac{\pi r_0^2 + (L - l)t}{\pi}} \quad (3)$$

is the outer radius of the tape on the yo-yo. Then, the mass and moment of inertia of the yo-yo are,

$$m_y = m + \rho(L - l), \quad I_y = kmr_0^2 + \frac{\pi\rho(r^4 - r_0^4)}{2t}. \quad (4)$$

In the approximation that the length l of the unwound tape is straight, the system has only two degrees of freedom, which we take to be the length l and the angle θ of that length to the vertical. Then, taking the origin to be at the support point of the tape, the center of the yo-yo is at position,

$$x_y = l \sin \theta + r \cos \theta, \quad y_y = -l \cos \theta + r \sin \theta, \quad (5)$$

which point has velocity,

$$\dot{x}_y = \dot{l} \sin \theta + l \cos \theta \dot{\theta} + \dot{r} \cos \theta - r \sin \theta \dot{\theta}, \quad \dot{y}_y = -\dot{l} \cos \theta + l \sin \theta \dot{\theta} + \dot{r} \sin \theta + r \cos \theta \dot{\theta}. \quad (6)$$

The velocity of the point on the tape that is just about to lose contact with the winding, relative to the center of the yo-yo is $\dot{l} - r\dot{\theta}$, so the angular velocity of the yo-yo is,

$$\omega = \frac{\dot{l} - r\dot{\theta}}{r} = \frac{\dot{l}}{r} - \dot{\theta}. \quad (7)$$

The kinetic energy of the system is,

$$T = \frac{\rho l^3 \dot{\theta}^2}{6} + \frac{m_y}{2} \left(\dot{l}^2 + \dot{r}^2 + (l^2 + r^2) \dot{\theta}^2 + 2l\dot{r}\dot{\theta} - 2r\dot{l}\dot{\theta} \right) + \frac{I_y \omega^2}{2}, \quad (8)$$

and the potential energy is,

$$V = -\frac{\rho g l^2 \cos \theta}{2} + m_y g y_y. \quad (9)$$

Lagrange's method can now be used to deduce the equations of motion for coordinates l and θ , but these are somewhat complicated. Here, we content ourselves with yet another approximation, that angle θ is negligibly small. In this case, the kinetic energy of the system is,

$$T \approx \frac{m_y}{2} \left(\dot{l}^2 + \dot{r}^2 \right) + \frac{I_y \dot{l}^2}{2r^2} \quad (\theta = 0), \quad (10)$$

and the potential energy is,

$$V = -\frac{\rho g l^2}{2} - m_y g l \quad (\theta = 0). \quad (11)$$

This is still somewhat complicated, so we restrict our attention to the case of a roll of tape wound on itself, *i.e.*, $m = 0 = r_0$, for which,

$$r = \sqrt{\frac{(L-l)t}{\pi}}, \quad \dot{r} = -\frac{t\dot{l}}{2\sqrt{\pi(L-l)t}}, \quad m_y = \rho(L-l), \quad I_y = \frac{\pi \rho r^4}{2t}, \quad (12)$$

$$T \approx \frac{3\rho \dot{l}^2 (L-l)}{4} + \frac{\rho \dot{l}^2 t}{8\pi} \quad (\theta = m = r_0 = 0), \quad (13)$$

and the potential energy is,

$$V = -\rho g l \left(L - \frac{l}{2} \right) \quad (\theta = m = r_0 = 0). \quad (14)$$

The total energy is zero, so $T = -V$, and,

$$\dot{l}^2 \left(1 + \frac{t}{6\pi(L-l)} \right) = \frac{2gl}{3} \frac{2L-l}{L-l} \quad (\theta = m = r_0 = 0). \quad (15)$$

Until the tape is almost completely unwound, $6\pi(L-l) \gg t$, during which time,

$$\dot{l}^2 \approx \frac{2gl}{3} \frac{2L-l}{L-l}, \quad \ddot{l} \approx g \frac{2L(L-l) + l^2}{3(L-l)^2} \quad (\theta = m = r_0 = 0). \quad (16)$$

The initial acceleration (when $l \approx 0$) is again $2g/3$, as found in sec. 2.1. The acceleration of the center of the roll of tape grows as it unwinds, reaching a maximum when $L-l \approx t$ with $\ddot{l}_{\max} \approx gL^2/3t^2 \gg g$.

Another approximation is that the tape is wound on a massless spool of radius r_0 and that the thickness t of the tape is negligible compared to r_0 . In this case the kinetic energy is $T = \rho(L-l)\dot{l}^2$ and the potential energy is $V = -\rho gl(L-l/2)$, such that,

$$\dot{l}^2 = g \frac{l(L-l/2)}{L-l}, \quad \ddot{l} = g \frac{2L(L-l) + l^2}{4(L-l)^2}. \quad (17)$$

Both \dot{l} and \ddot{l} diverge as l approaches L .

As discussed in [1]-[5], if a roll of tape unwinds down an inclined plane, the end of the unrolling tape strikes the plane with very high speed, making a loud sound.

2.3 Unwinding Spool with Fixed Axle

For the third example sketched on p. 1, where the spool has a fixed axle and mass M hangs from the end of the tape, eqs. (3)-(7) hold again, but with the interpretation that (x_y, y_y) is the position of mass M . Then, (\dot{x}_y, \dot{y}_y) is the velocity of mass M , and of the lower end of the unwound tape. The velocity of the upper end of the unwound tape is the sum of the velocity of the point $\mathbf{p} = (r \cos \theta, r \sin \theta)$ where the tape leaves the spool and the velocity $\boldsymbol{\omega} \times \mathbf{p} = \omega(-p_y, p_x)$ of the tape relative to that point. That is,

$$\dot{x}_{\text{upper}} = \dot{p}_x - \omega p_y, \quad \dot{y}_{\text{upper}} = \dot{p}_y + \omega p_x, \quad (18)$$

such that the velocity of the center of mass of the unwound tape is,

$$\dot{x}_u = \frac{\dot{x}_y + \dot{x}_{\text{upper}}}{2}, \quad \dot{y}_u = \frac{\dot{y}_y + \dot{y}_{\text{upper}}}{2}. \quad (19)$$

The kinetic energy of this system is,

$$T = \frac{M}{2}(\dot{x}_y^2 + \dot{y}_y^2) + \frac{\rho l}{2}(\dot{x}_u^2 + \dot{y}_u^2) + \frac{\rho l^3 \dot{\theta}^2}{24} + \frac{I_y \omega^2}{2}, \quad (20)$$

Recalling that ρ is the linear mass density of the tape, the potential energy is,

$$V = Mgy_y + \rho lgy_u. \quad (21)$$

In the approximations that the angle θ of the tape to the vertical is negligible, and that terms in \dot{r} are negligible, then $\dot{\mathbf{p}} = 0$, $\omega = \dot{l}/r$, $\dot{x}_u = \dot{x}_y = 0$, $\dot{y}_u = \dot{y}_y = -\dot{l}$, and the kinetic energy becomes,

$$\begin{aligned} T &\approx \frac{\dot{l}^2}{2} \left(M + \rho l + \frac{I_y}{r^2} \right) \\ &= \frac{\dot{l}^2}{2} \left(M + \rho l + \frac{\pi k m r_0^2}{\pi r_0^2 + (L-l)t} + \frac{\rho[\pi r_0^2 + (L-l)t]}{2t} - \frac{\pi^2 \rho r_0^4}{2t[\pi r_0^2 + (L-l)t]} \right), \end{aligned} \quad (22)$$

recalling eqs. (3) and (4), while the potential energy is now,

$$V \approx -Mgl - \frac{\rho l^2 g}{2}. \quad (23)$$

The total energy is zero, so again $T = -V$, and,

$$\dot{l}^2 \left(M + \rho l + \frac{\pi k m r_0^2}{\pi r_0^2 + (L-l)t} + \frac{\rho[\pi r_0^2 + (L-l)t]}{2t} - \frac{\pi^2 \rho r_0^4}{2t[\pi r_0^2 + (L-l)t]} \right) = 2Mgl + \rho l^2 g. \quad (24)$$

The resulting expression for \dot{l} could be integrated numerically to find $l(t)$.

A somewhat trivial case is that the hanging mass M is large compared to the mass of the spool and tape, for which $\ddot{l} = g$. Another special case is that the spool has zero radius, $r_0 = 0$, such that,

$$\dot{l}^2 [2M + \rho(L+l)] = 2gl(2M + \rho l), \quad \ddot{l} = g \frac{2M[2M + \rho(L+2l)] + \rho^2 l(2L+l)}{[2M + \rho(L+l)]^2}. \quad (25)$$

If there is no hanging mass M , the acceleration of the unwound tape becomes,

$$\dot{l}^2 = g \frac{2l^2}{L+l}, \quad \ddot{l} = g \frac{l(2L+l)}{(L+l)^2}, \quad (26)$$

which starts out at zero and rises to $3g/4$ when the tape is fully unwound.¹ The center of mass of the unwound tape is at,

$$y_{\text{cm}} = -\frac{l^2}{2L}, \quad \ddot{y}_{\text{cm}} = -\frac{l\ddot{l} + \dot{l}^2}{L} = -g \frac{l^2(4L+3l)}{L(L+l)^2}. \quad (27)$$

As the tape becomes fully unwound, the acceleration of the center of mass of the tape is $\ddot{y}_{\text{cm}} \rightarrow -7g/4$, but once the tape is fully unwound \ddot{y}_{cm} must be $-g$.²

Acknowledgment

Thanks to Johann Otto for discussions of this problem.

References

- [1] L.T. Pockman, *Nonconservation of Energy—A Paradox*, Am. J. Phys. **9**, 50 (1941), http://kirkmcd.princeton.edu/examples/mechanics/pockman_ajp_9_50_41.pdf
- [2] I.A. Freeman, *The Dynamics of a Roll of Tape*, Am. J. Phys. **14**, 124 (1946), http://kirkmcd.princeton.edu/examples/mechanics/freeman_ajp_14_124_46.pdf
- [3] L.T. Pockman, *More on the Dynamics of a Roll of Tape*, Am. J. Phys. **14**, 275 (1946), http://kirkmcd.princeton.edu/examples/mechanics/pockman_ajp_14_275_46.pdf

¹The angular velocity of the still-wound tape diverges as the unwound length l approaches L , and the approximation that the unwound tape is entirely vertical breaks down.

²This discrepancy is further evidence that the approximations used here do not hold well as the length l of the unwound tape approaches L , for the idealized case that $M = 0$ and $r_0 = 0$.

- [4] P. Calvini, *Dynamics of a tape that unwinds while rolling down an incline*, Am. J. Phys. **51**, 226 (1983), http://kirkmcd.princeton.edu/examples/mechanics/calvini_ajp_51_226_83.pdf
- [5] C.E. Mungan and T.C. Lipscombe, *When experiment and energy conservation collide: video analysis of an unrolling mat*, Eur. J. Phys. **39**, 024003 (2018), http://kirkmcd.princeton.edu/examples/mechanics/mungan_ejp_39_025004_18.pdf