

Energy deposition for intense muon sources (chicane + the rest of the front end)


Pavel Snopok
Illinois Institute of Technology
and
Fermilab
December 4, 2014

Outline




- Introduction
- History
- Current MARS simulations
 - new data files for solid target
- Using other codes (ICOOOL and G4beamline)
- Summary

Introduction

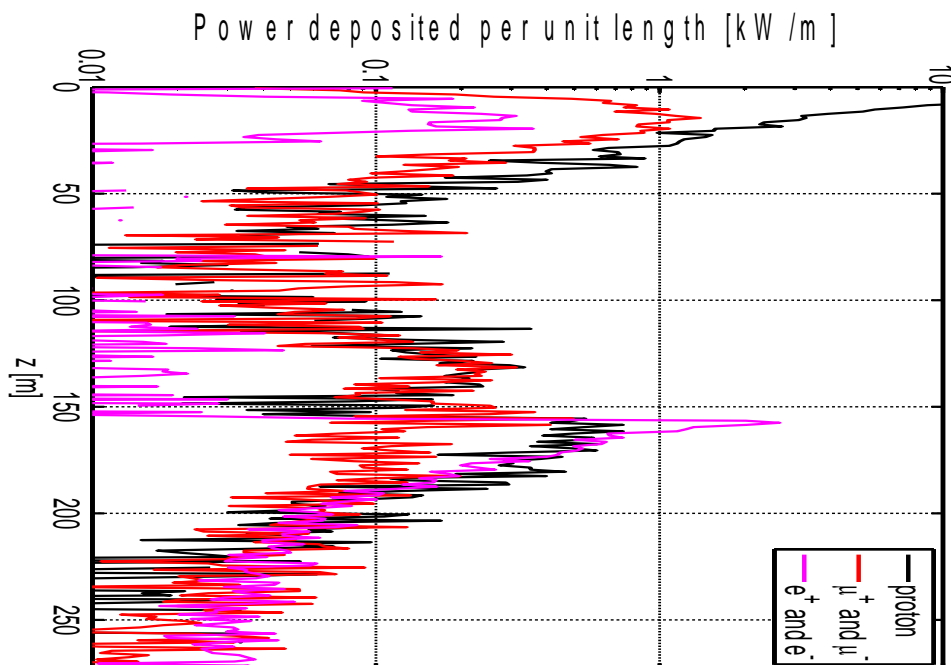


- In high-intensity sources muons are produced by firing high energy p onto a target to produce π .
- π decay to μ which are captured and accelerated.
- Significant background from p and e^- , which may result in
 - heat deposition on superconducting materials;
 - activation of the machine preventing manual handling.

Introduction, contd.

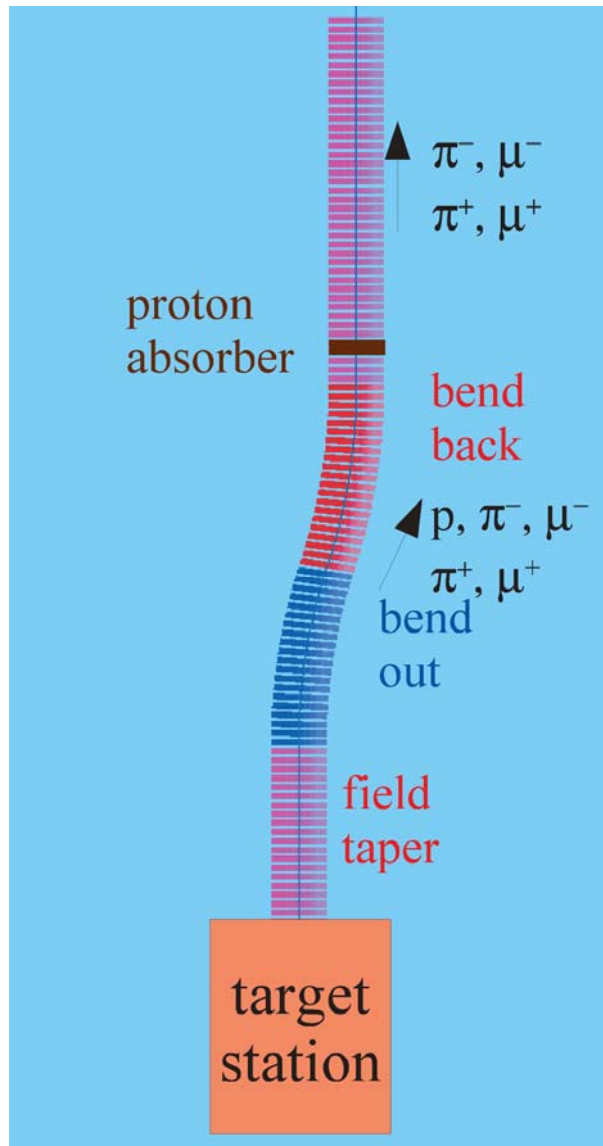


- Need a secondary particle handling system for a megawatt class solid C target
 - solenoidal chicane
 - followed by a proton absorber.
- Challenges of optimization and integration of the system with the rest of the muon front end.
- Main study tool – MARS, some analysis and validation by using ICOOL and G4beamline.
- Start with the chicane, use the same technique downstream to study the the buncher and phase-rotator sections.

History: MARS simulations

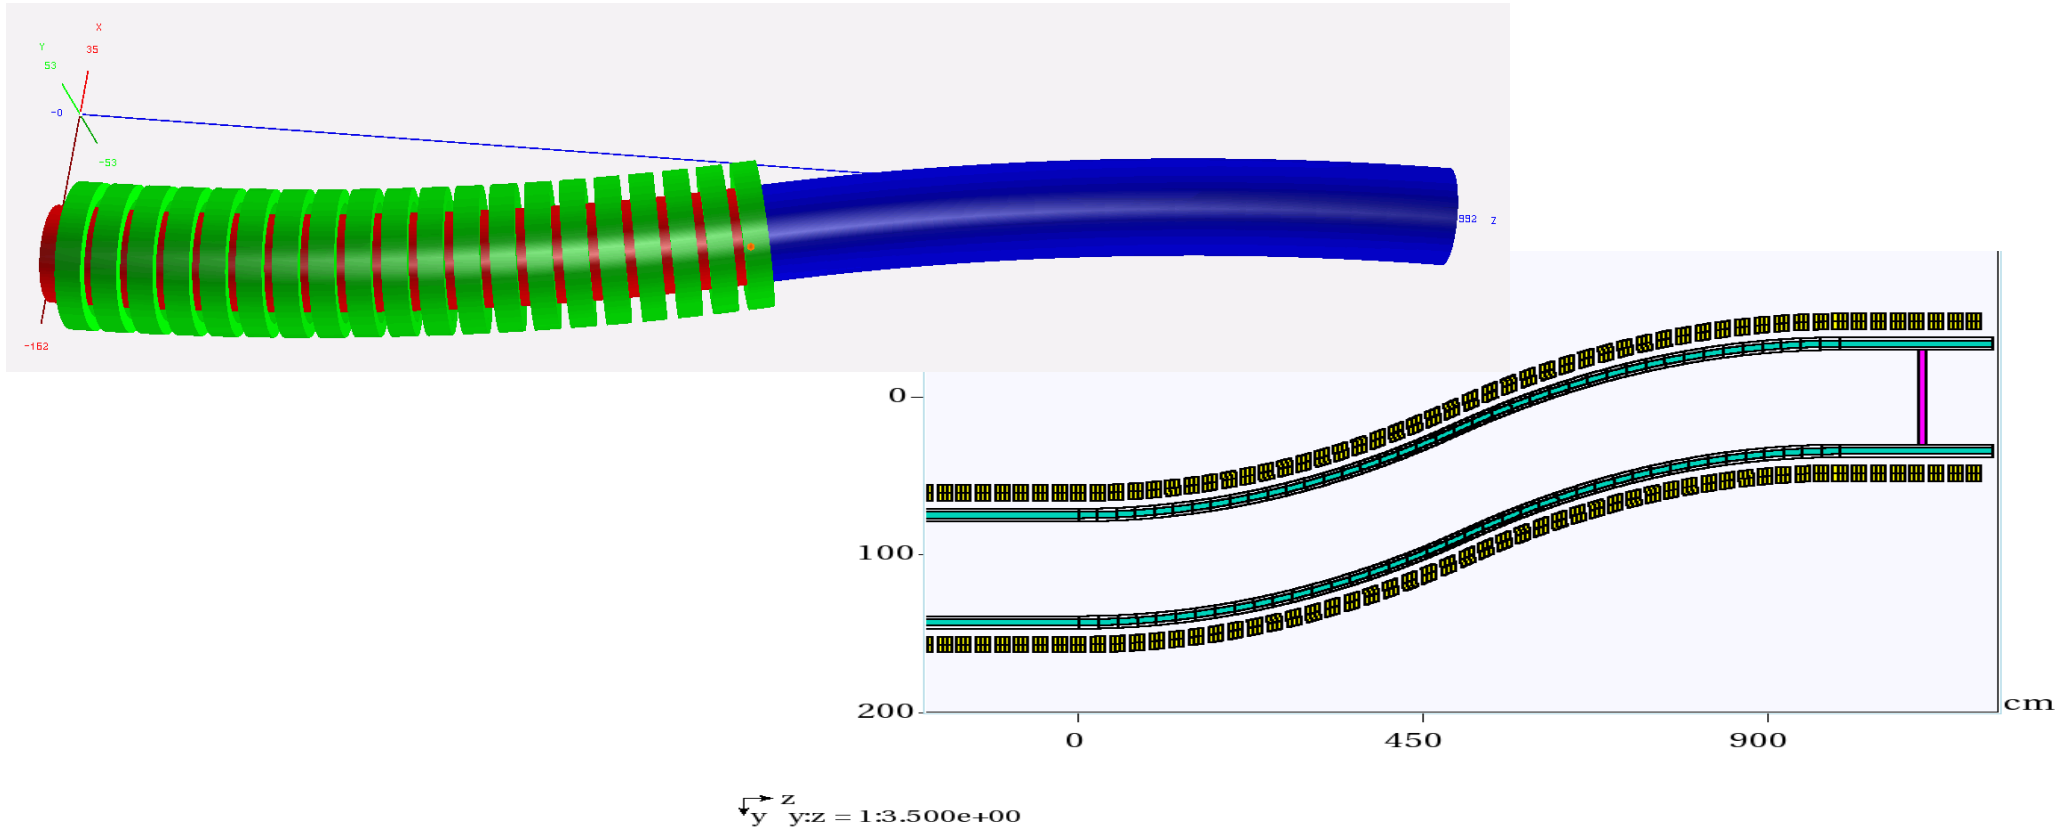


- ROOT-based geometry
- 12.5° single bend, $Z=0$ corresponds to 19 m downstream of the target
 - consistent with RDR (IDS-NF).
- W density reduced to 60% to take into account packing fraction for beads.

Reference: no shielding

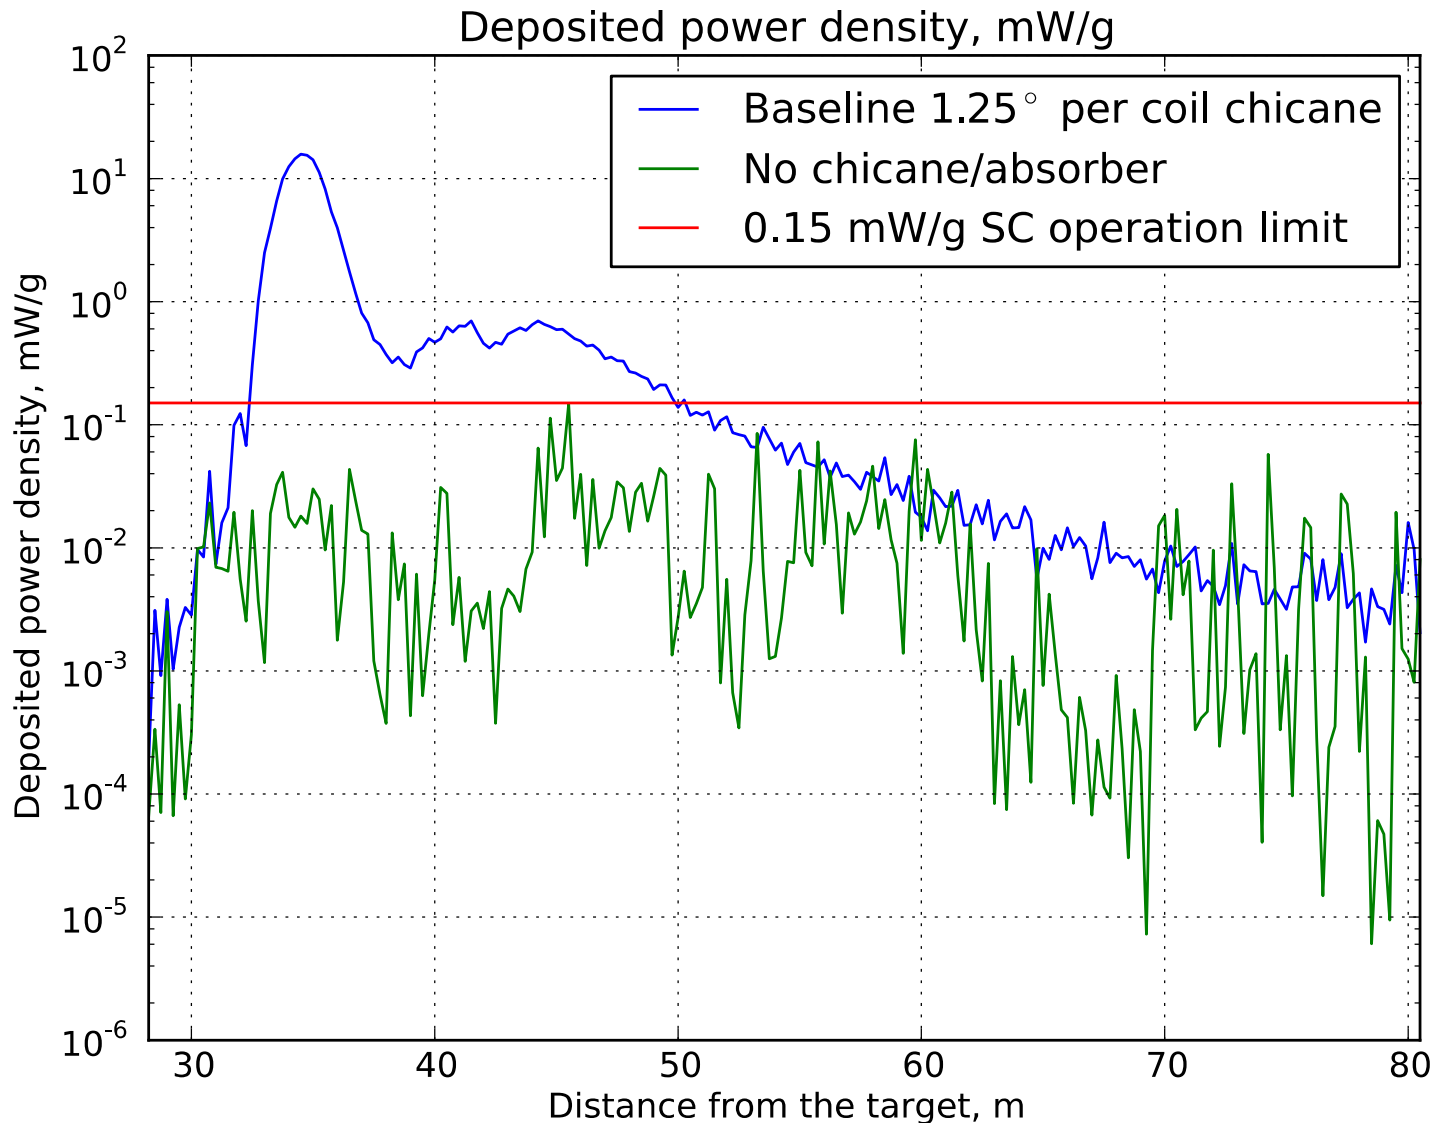


DPD peaks at 15.8 mW/g, that translates into 42.6 kW/m for Cu coils or 33.3 kW/m for SC coils.

Uniform 35 cm shielding

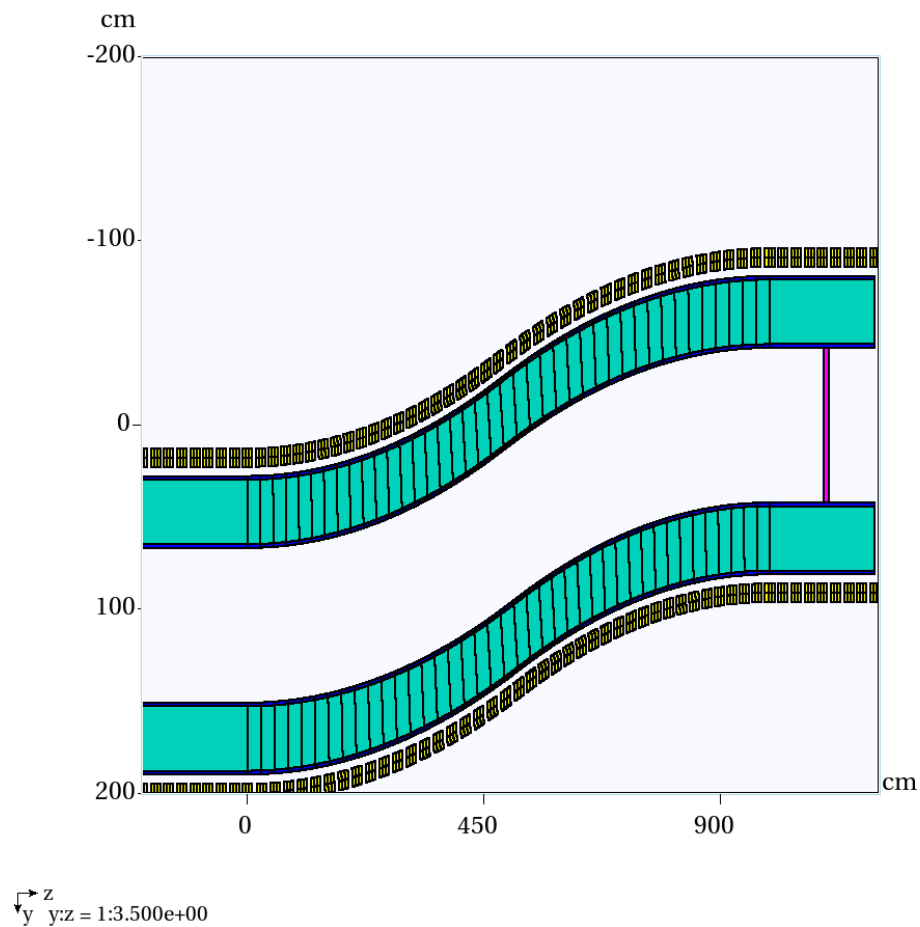


Empty channel

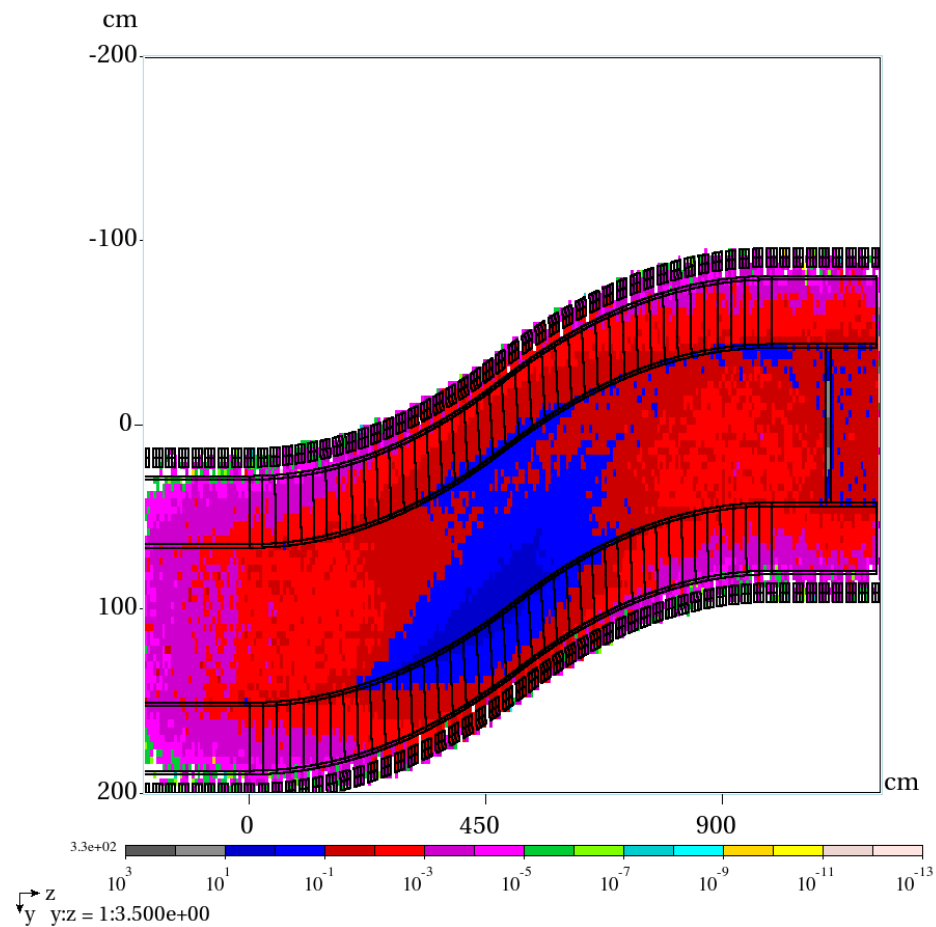


PD total, mW/g

Non-uniform 30 and 40 cm shielding

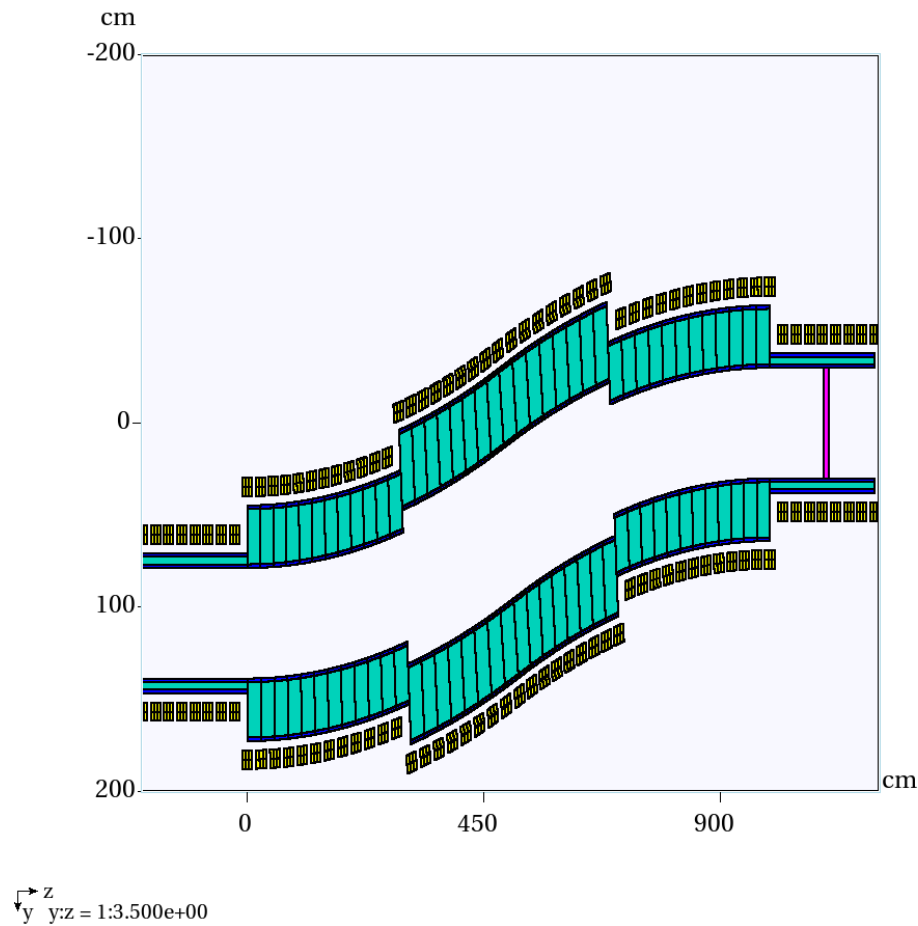


Empty channel

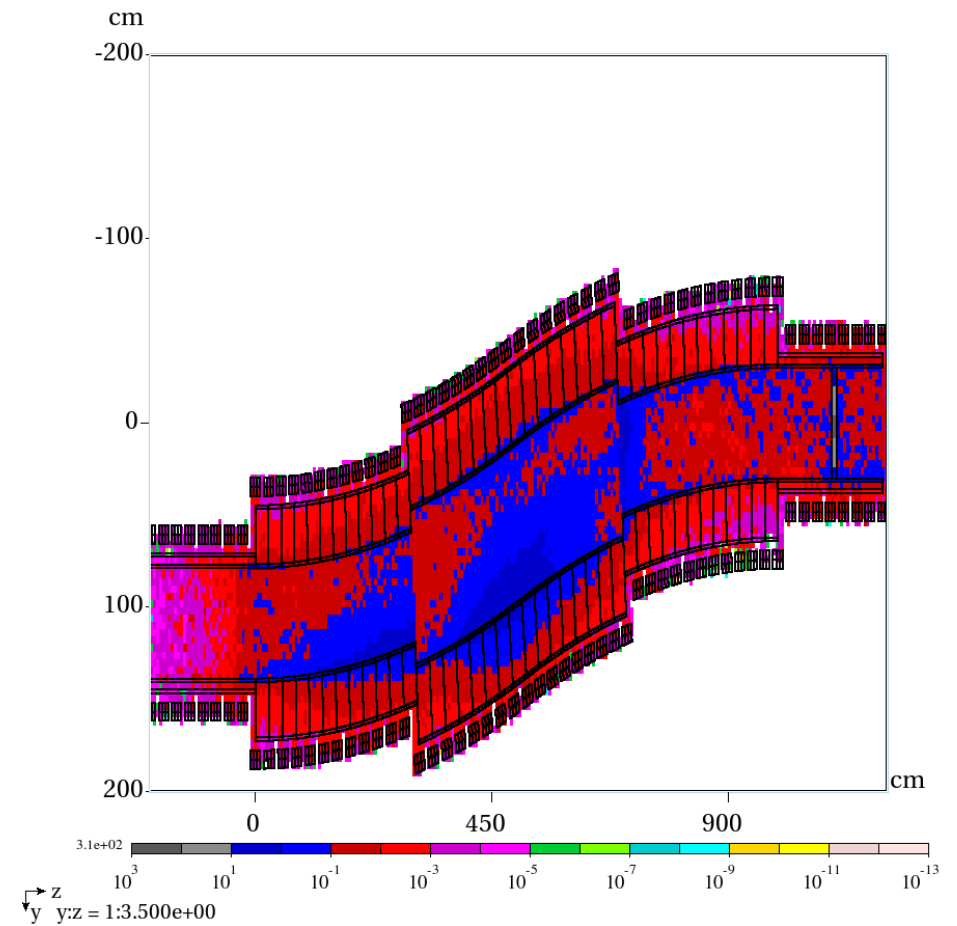


PD total, mW/g

Overall DPD per coil/segment

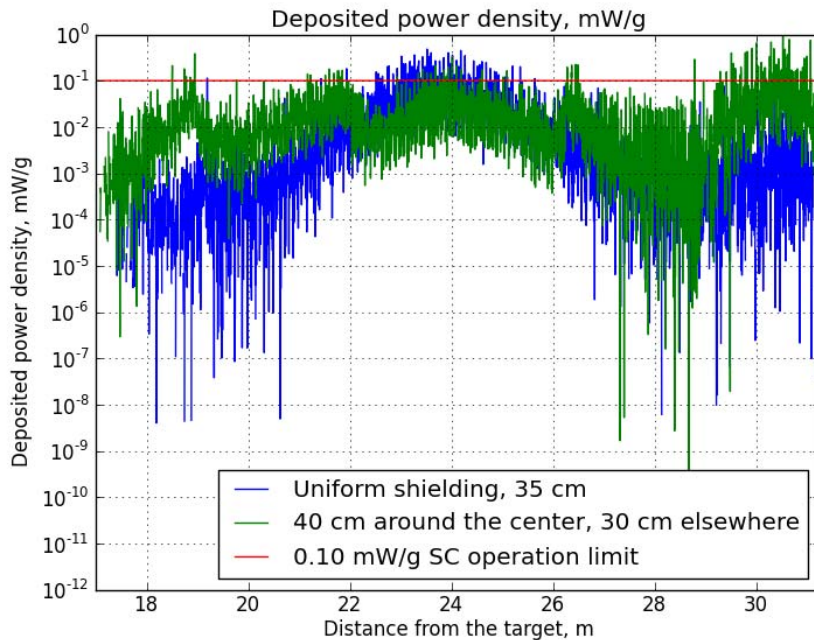

Segmented coil analysis, total DPD, mW/g

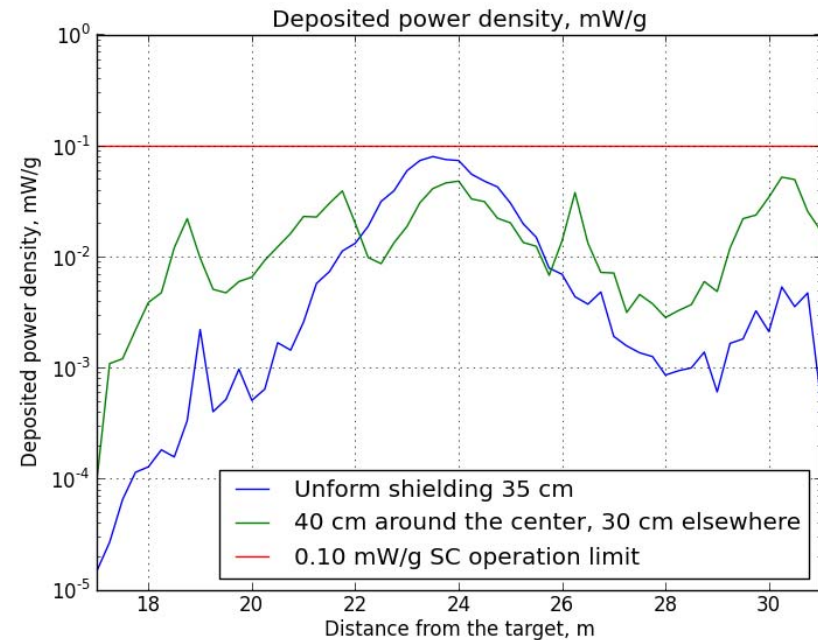

Average DPD per coil, mW/g


In both cases red line corresponds to 0.1 mW/g SC limit

Current MARS simulations




- New target parameters:
 - 8 GeV \Rightarrow 6.75 GeV
 - 4 MW \Rightarrow 1 MW
 - 3.125×10^{15} protons/sec \Rightarrow 0.925×10^{15} protons/sec
 - new particle distribution
 - need to re-run MARS
- The hope is that the new parameters help reduce the amount of shielding required

New results

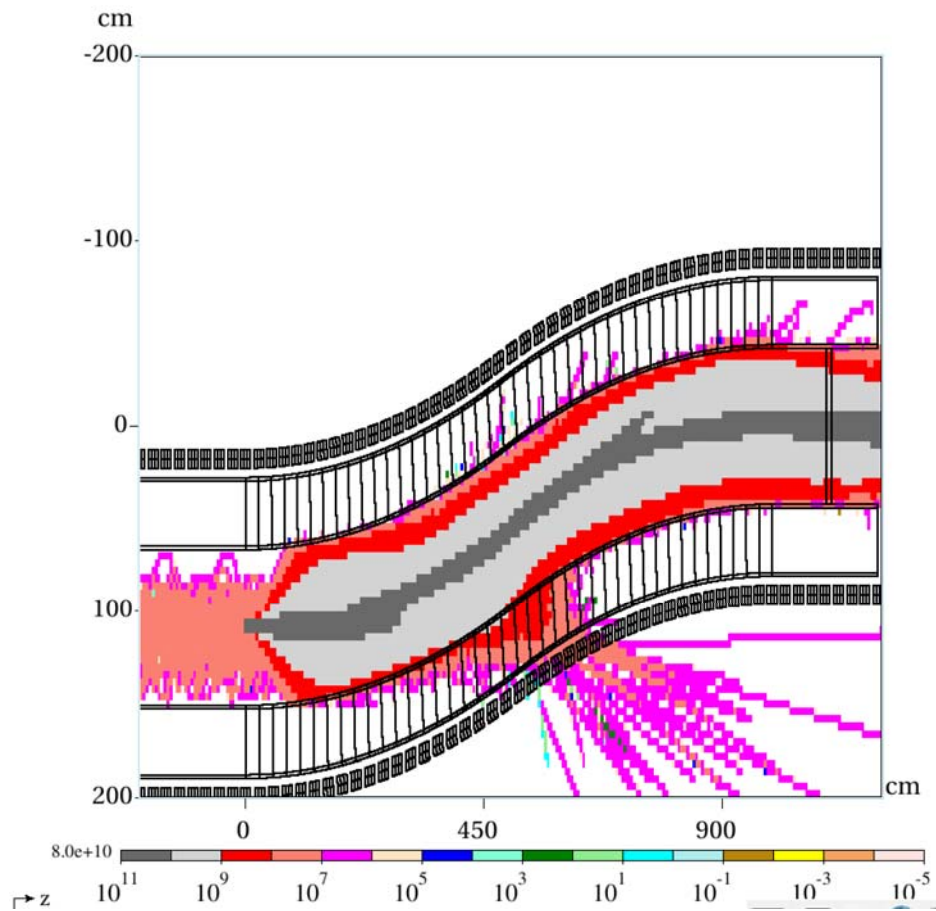


Muon flux, top view

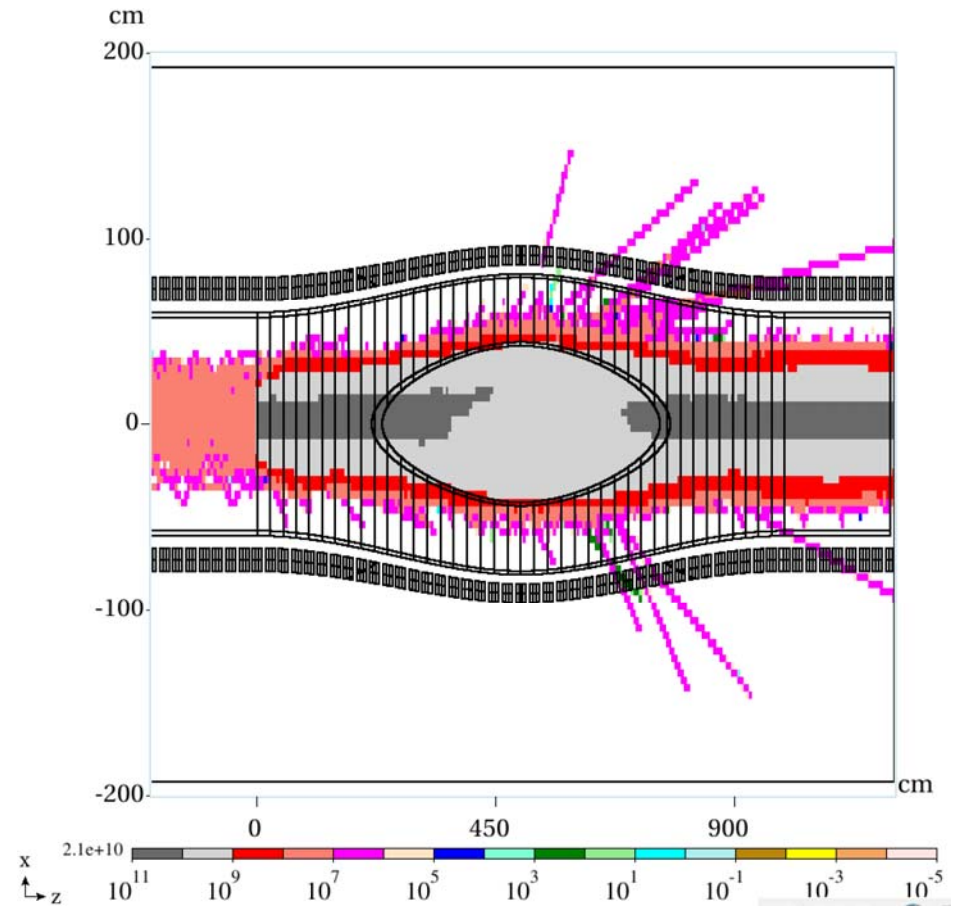


Muon flux, side view

New results 2

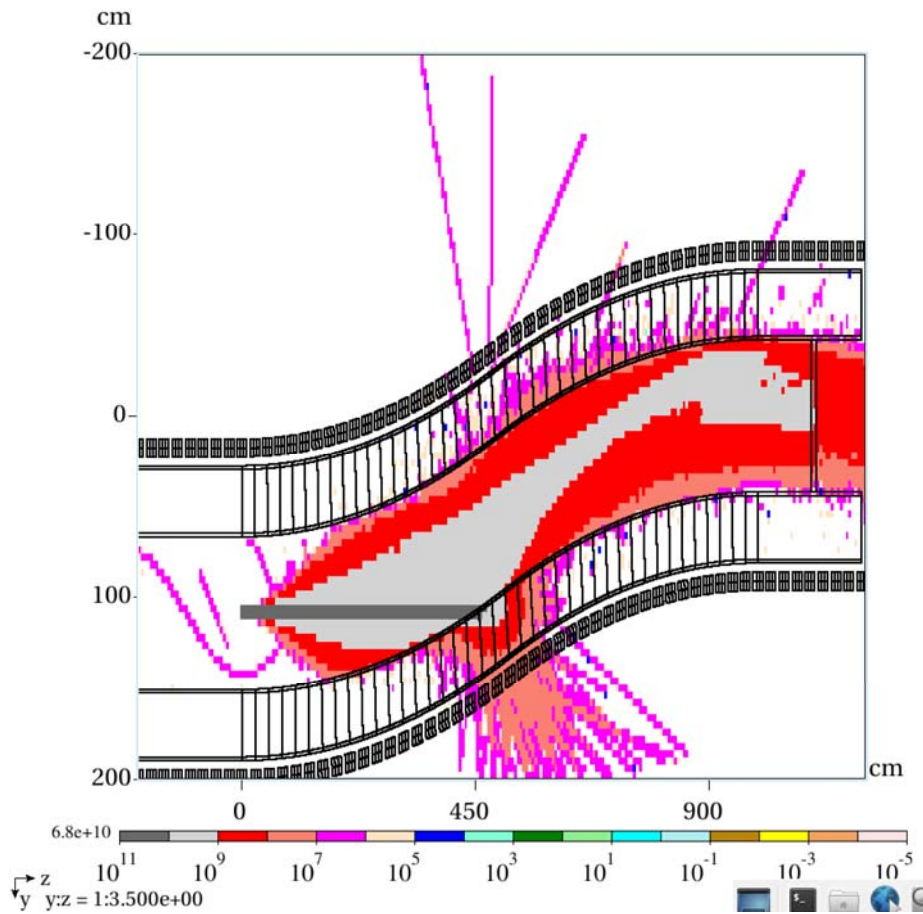


Proton flux, top view

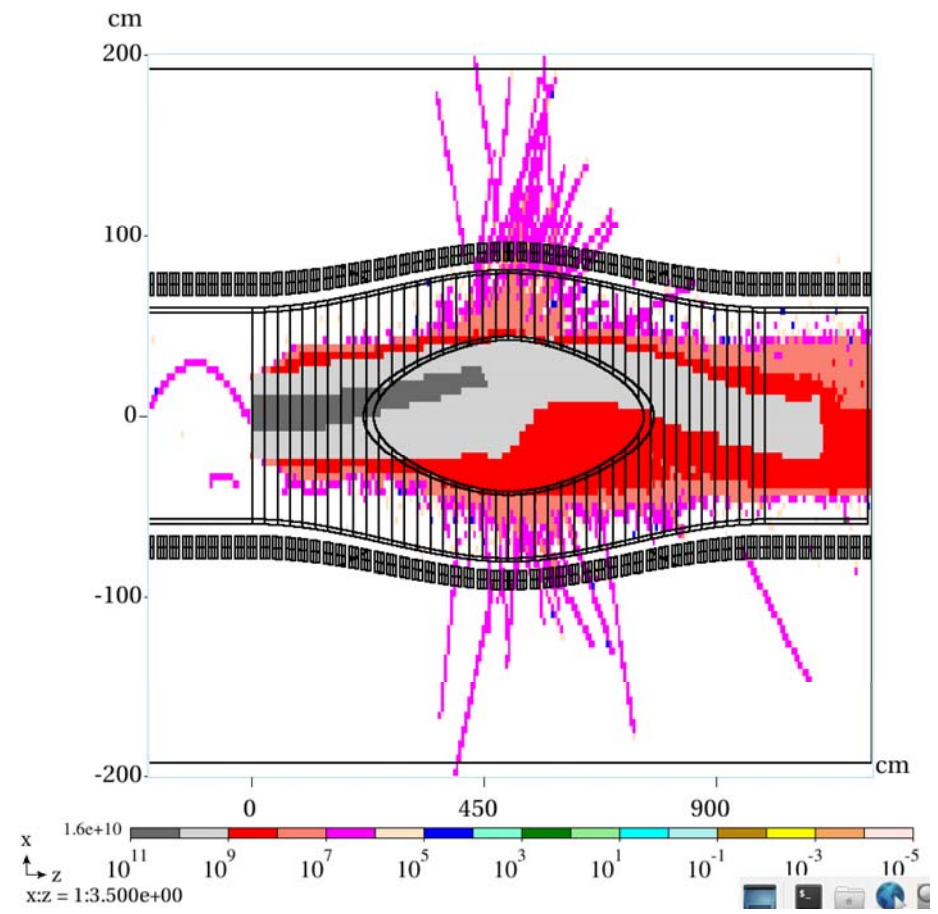


Proton flux, side view

New results 3

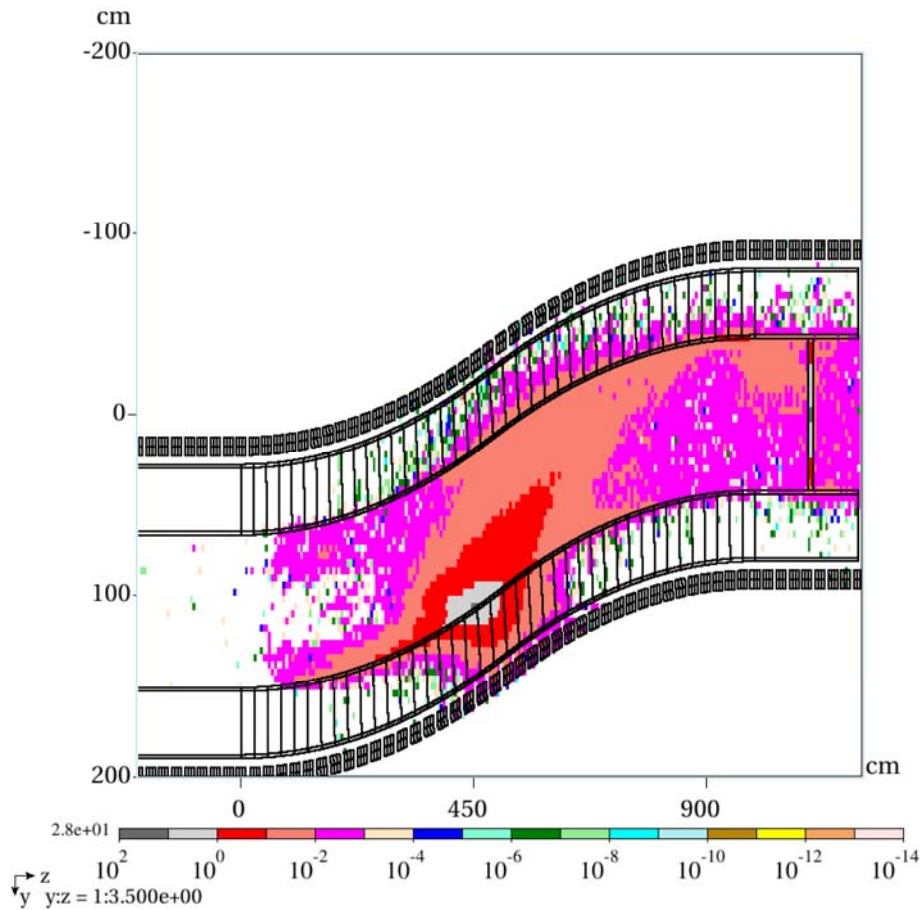


Deposited power density, mW/g,
top view

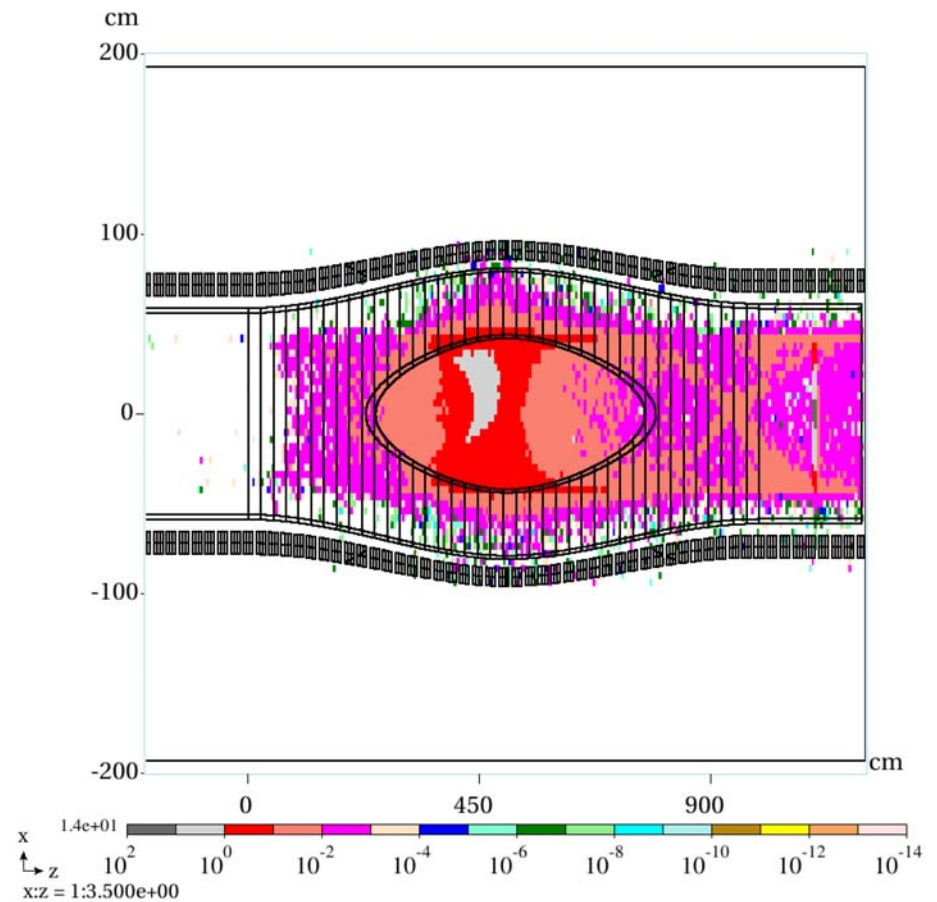


Deposited power density, mW/g,
side view

New results 4

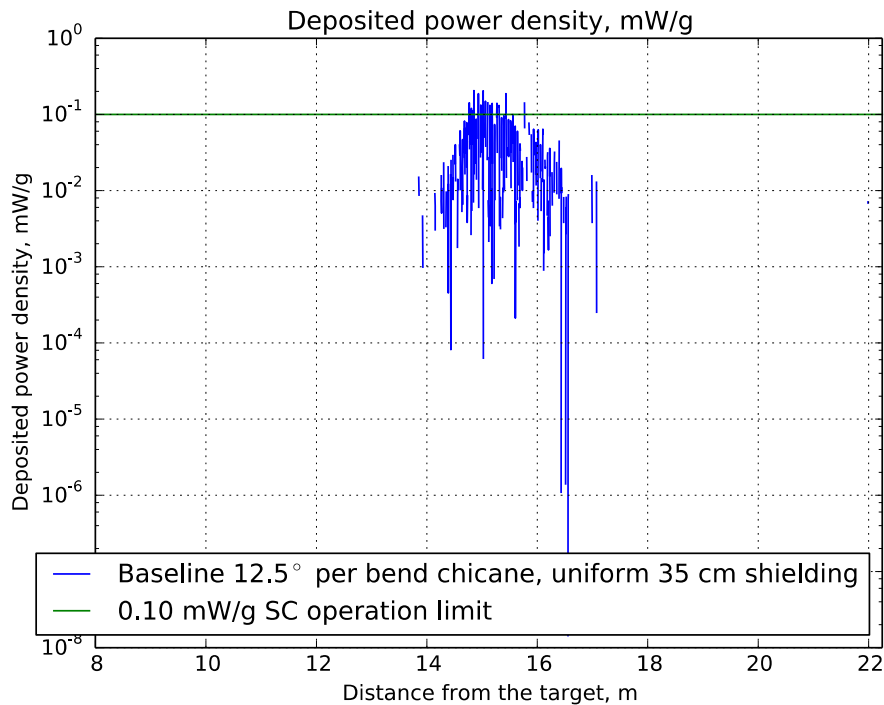


Deposited power density, mW/g
segmented coil analysis

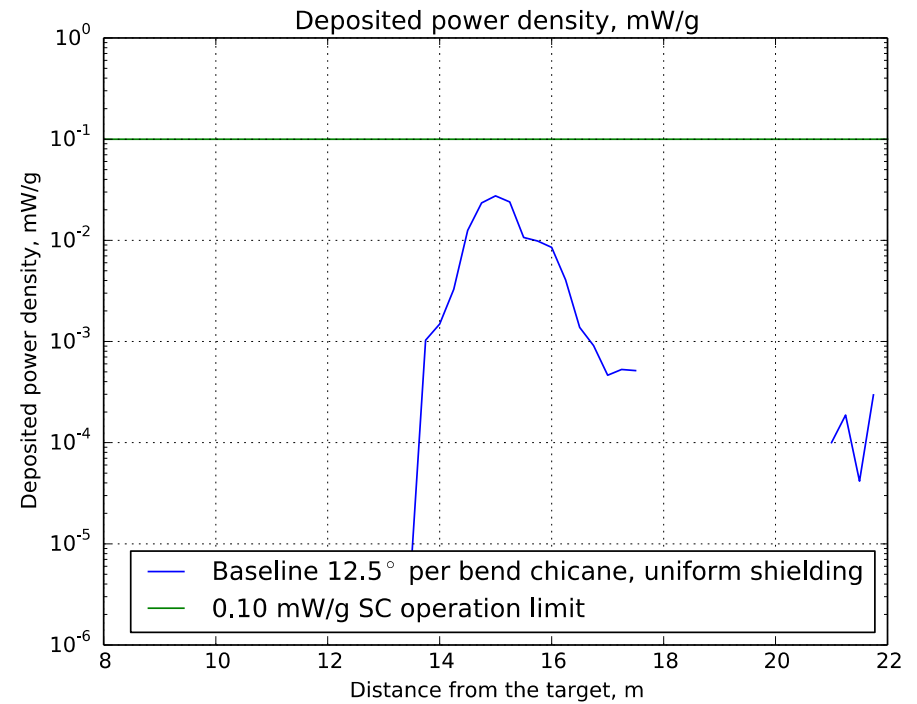

Deposited power density, mW/g
averaged

Other codes

- Can G4beamline or ICOOL be used for energy loss/deposition calculations?
- Back in 2010 I did a comparison of the two codes for IDR:

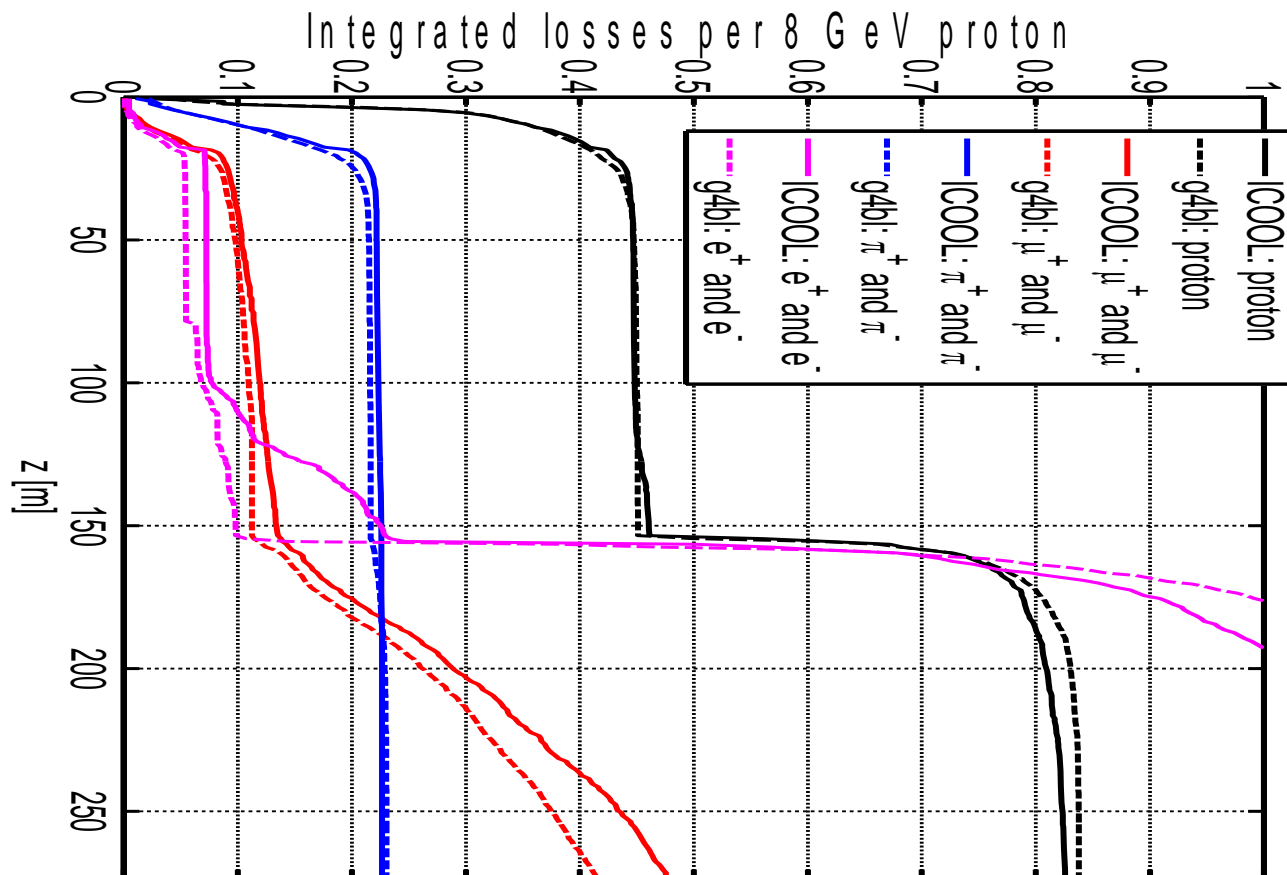

Summary



- Simulations of the new 1 MW graphite target are underway, first results presented.
 - power density > 0.1 mW/g only in a handful of central coils, very low everywhere else;
 - definitely do not need 35 cm of tungsten.
- Action item: implement a more sophisticated geometry (elliptical cross-section following the profile of the beam).
 - this will allow to significantly reduce the amount of W used for shielding.
- MARS is the main tool, although G4beamline and ICOOL can also be used for some analyses.

Thank you!