
High-Power Targets

for Neutrino Factories and Muon Colliders


Including Lessons from the MERIT Experiment

K.T. McDonald
Princeton U.
MUTAC Meeting
FNAL, April 6, 2009



Target System Specifications

Item	Neutrino Factory Study 2	Neutrino Factory IDS / Muon Collider	Comments
Beam Power	4 MW	4 MW	No existing target system will survive at this power
E_p	24 GeV	8 GeV	π yield for fixed beam power peaks at ~ 8 GeV
Rep Rate	50 Hz	50 Hz	
Bunch width	~ 3 ns	~ 3 ns	Very challenging for proton driver
Bunches/pulse	1	3	3-ns bunches easier if 3 bunches per pulse
Bunch spacing	-	~ 100 μ s	
Beam dump	< 5 m from target	< 5 m from target	Very challenging for target system
π Capture system	20-T Solenoid	20-T Solenoid	ν Superbeams use toroidal capture system
π Capture energy	$40 < T_\pi < 180$ MeV	$40 < T_\pi < 180$ MeV	Much lower energy than for ν Superbeams
Target geometry	Free liquid jet	Free liquid jet	Moving target, replaced every pulse
Target velocity	20 m/s	20 m/s	Target moves by 50 cm ~ 3 int. lengths per pulse
Target material	Hg	Hg	High-Z material favored for central, low-energy π 's
Dump material	Hg	Hg	Hg pool serves as dump and jet collector
Target radius	5 mm	4 mm	Proton $\sigma_r = 0.3$ of target radius
Beam angle	67 mrad	80 mrad	Thin target at angle to capture axis maximizes π 's
Jet angle	100 mrad	60 mrad	Gravity favors bringing jet in below proton beam



Solenoid Target and Capture Topology

Desire $\approx 10^{14}$ μ/s from $\approx 10^{15}$ p/s (≈ 4 MW proton beam).

Highest rate μ^+ beam to date: PSI $\mu E4$ with $\approx 10^9$ μ/s from $\approx 10^{16}$ p/s at 600 MeV.

\Rightarrow Some R&D needed!

R. Palmer (BNL, 1994) proposed a solenoidal capture system.

Low-energy π 's collected from side of long, thin cylindrical target.

Collects both signs of π 's and μ 's,
 \Rightarrow Shorter data runs (with magnetic detector).

Solenoid coils can be some distance from proton beam.


\Rightarrow ≥ 4 -year life against radiation damage at 4 MW.

Liquid mercury jet target replaced every pulse.


Proton beam readily tilted with respect to magnetic axis.

\Rightarrow Beam dump (mercury pool) out of the way of secondary π 's and μ 's.

Neutrino Factory Study 2 Target Concept

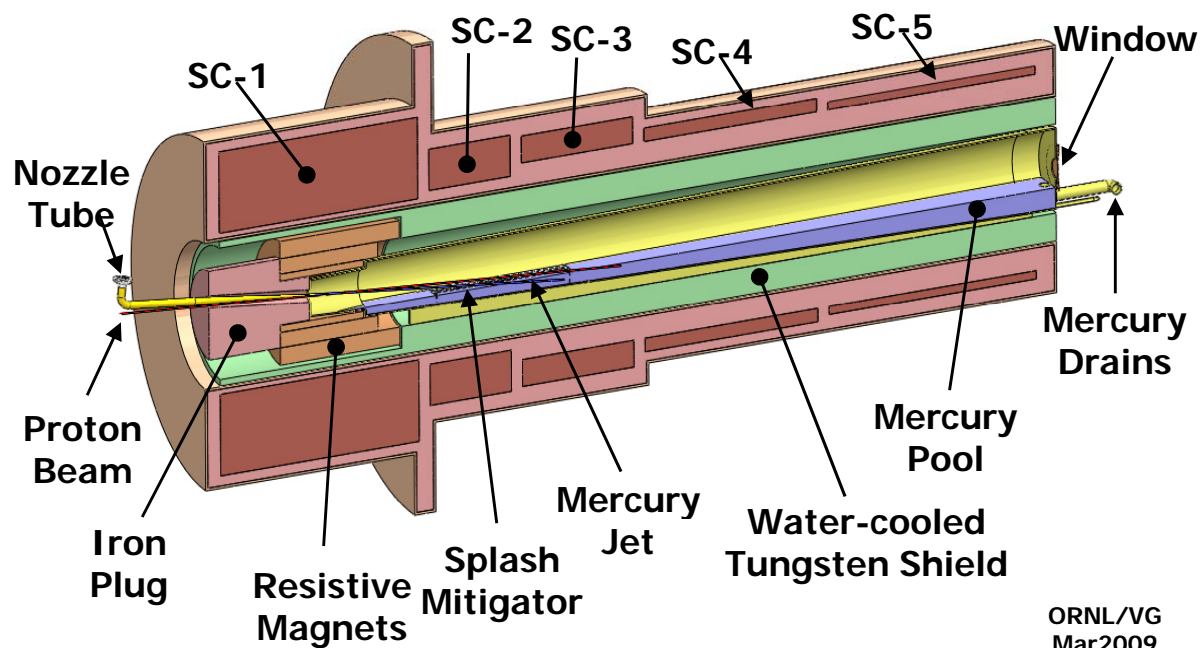

ORNL/VG
Mar2009



Remember the Beam Dump

Target of 2 interaction lengths \Rightarrow 1/7 of beam is passed on to the beam dump.

\Rightarrow Energy deposited in dump by primary protons is same as in target.

Long distance from target to dump at a Superbeam,

\Rightarrow Beam is much less focused at the dump than at the target,

\Rightarrow Radiation damage to the dump not a critical issue (Superbeam).

Short distance from target to dump at a Neutrino Factory/Muon Collider,

\Rightarrow Beam still tightly focused at the dump,

\Rightarrow Frequent changes of the beam dump, or a moving dump, or a liquid dump.

A flowing liquid beam dump is the most plausible option for a Neutrino Factory, independent of the choice of target. (This is so even for a 1-MW Neutrino Factory.)

The proton beam should be tilted with respect to the axis of the capture system at a Neutrino Factory, so that the beam dump does not absorb the captured π 's and μ 's.



Target Options

MW energy dissipation requires liquid coolant somewhere in system

⇒ No such thing as "solid-target-only" at this power level.

The lifetime dose against radiation damage (embrittlement, cracking, ...) by protons for most solids is about $10^{22}/\text{cm}^2$.

- Target lifetime of about 5-14 days at a 4-MW Neutrino Factory
- Mitigate by frequent target changes, moving target, liquid target, ...

• Static Solid Targets

- Graphite (or carbon composite) cooled by water/gas/radiation [CNGS, NuMI, T2K]
- Tungsten or Tantalum (discs/rods/beads) cooled by water/gas [PSI, LANL]


• Moving Solid Targets

- Rotating wheels/cylinders cooled (or heated!) off to side [SLD, FNAL, SNS]
- Continuous or discrete belts/chains [King]
- Flowing powder [Densham]

• Flowing liquid in a vessel with beam windows [SNS, ESS]

- But, cavitation induced by short beam pulses cracks pipes!

• Free liquid jet [Neutrino Factory Study 2]





Pion Production Issues for ν Factory/Muon Collider, I

MARS simulations: N. Mohkov, H. Kirk, X. Ding

Only pions with $40 < KE_{\pi} < 180$ MeV are useful for later RF bunching/acceleration of their decay muons.

Hg better than graphite in producing low-energy pions (graphite is better for higher energy pions as for a Superbeam).

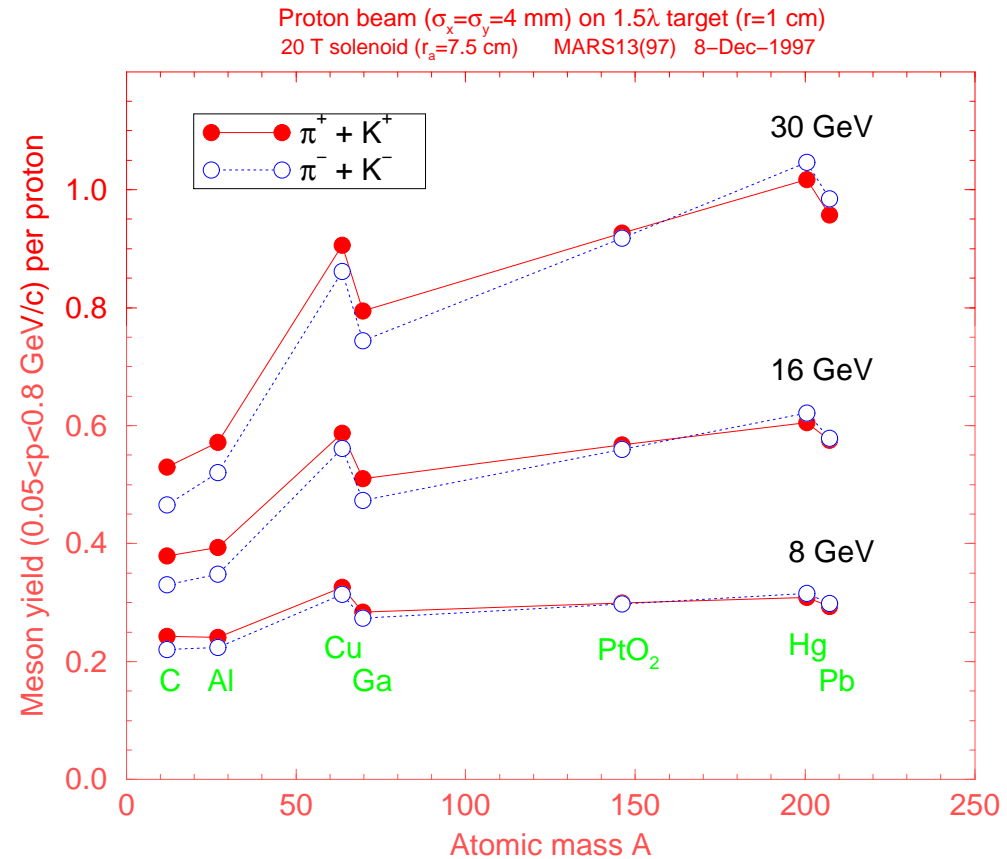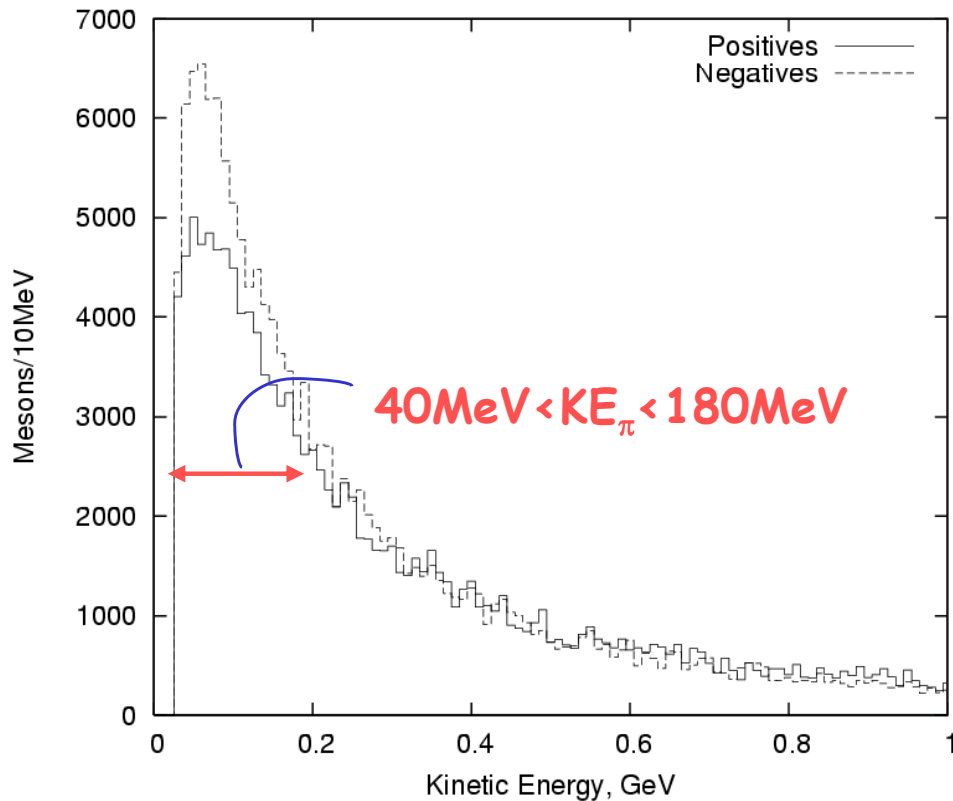


Pion Production Issues for ν Factory/Muon Collider, II

Study soft pion production as a function of 4 parameters:


- E_{proton}
- Target radius, assuming proton $\sigma_r = 0.3 \times$ target radius
- Angle of proton beam to magnetic axis
- Angle of mercury jet to magnetic axis

Production of soft pions is optimized for a Hg target at $E_p \sim 6-8$ GeV, according to a MARS15 simulation. [Confirmation of low-energy dropoff by FLUKA highly desirable.]


Normalized Distribution

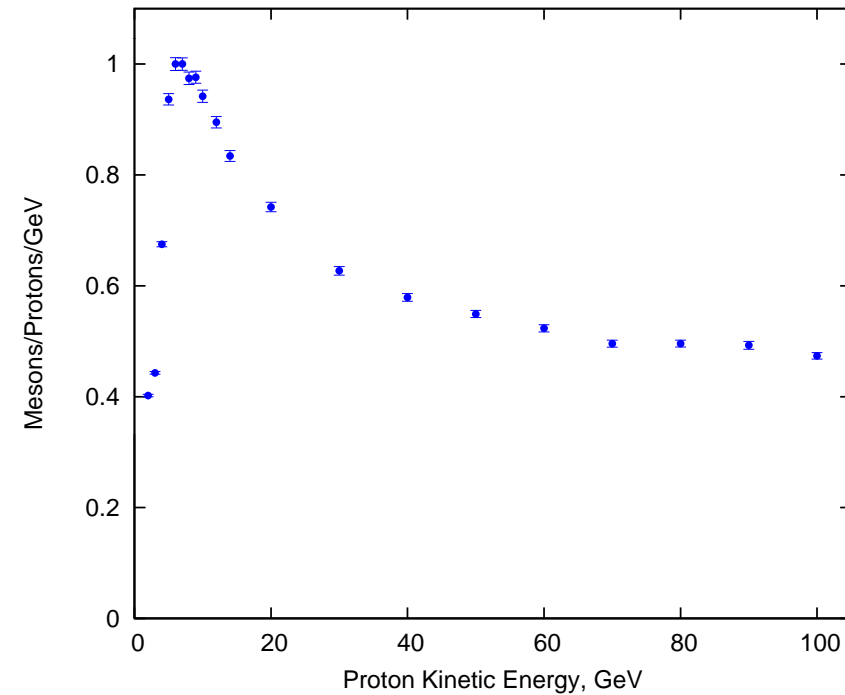



Optimized Target Radius

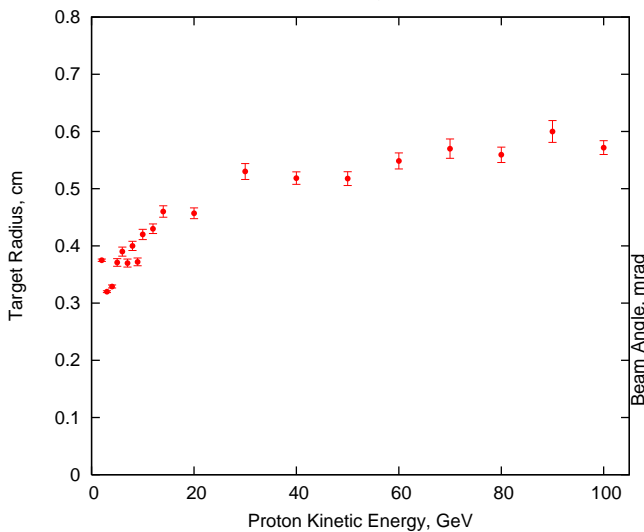

Optimized Beam Angle

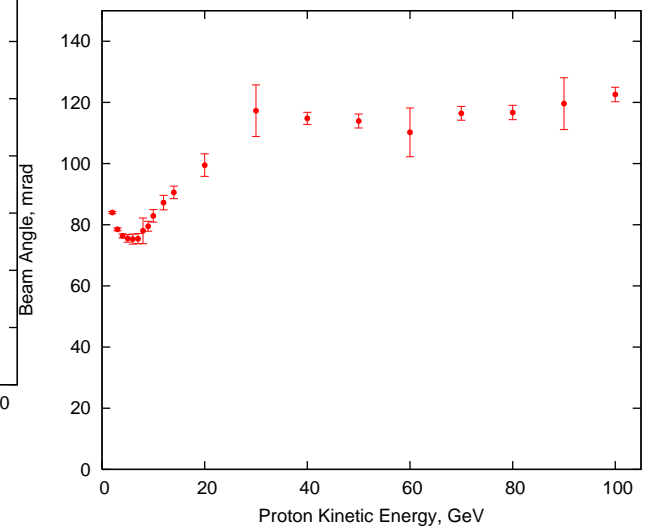

Optimized Crossing Angle

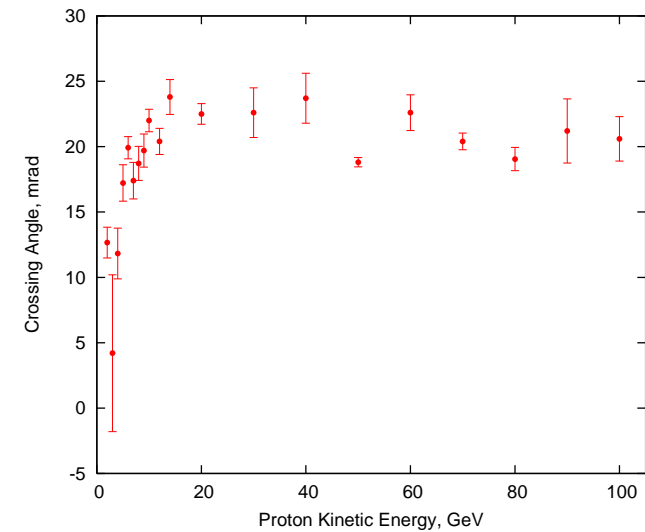

Pion Production Issues for ν Factory/Muon Collider, III


For $E_p = 8$ GeV, optimal target radius = 4 mm,
 optimal proton beam angle = 80 mrad,
 optimal jet-beam crossing angle = 20 mrad.

Gravity deflects a 20-m/s jet by 20 mrad in 50 cm,


⇒ Bring jet in from **below** proton beam for larger clearance between nozzle and beam.

[Jet recrosses proton beam at $z = 160$ cm, $y = -12$ cm, i.e., close to surface of mercury pool.]


Hg Jet/Proton Beam Trajectories

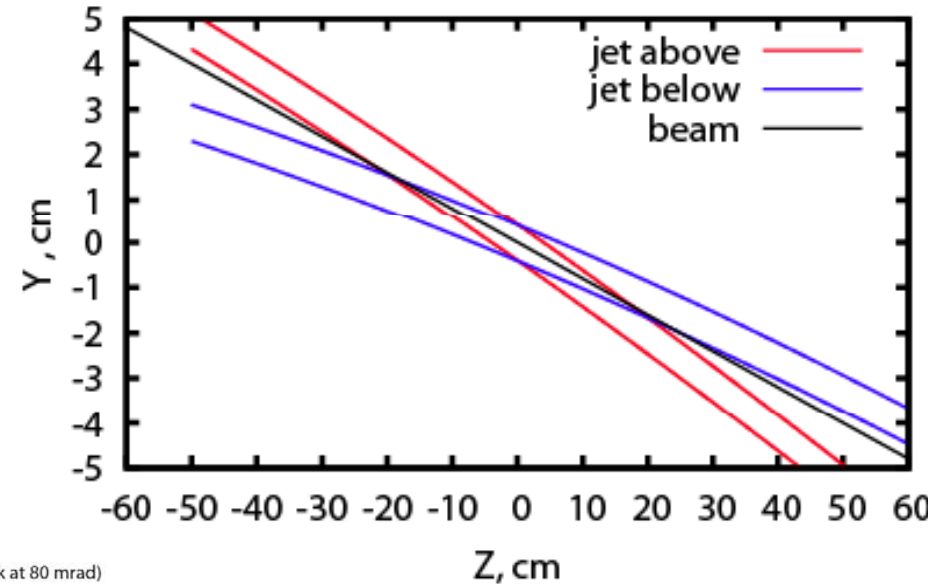



Vary the Target Radius (Peak at 0.4 cm)

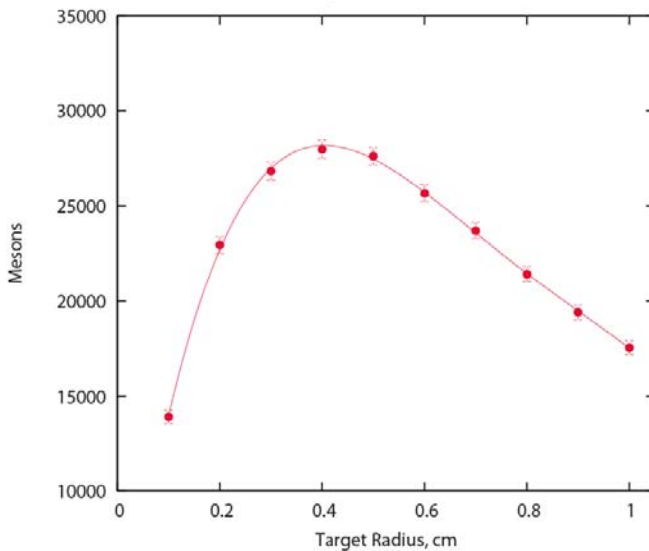



Vary the Beam Angle (Peak at 80 mrad)

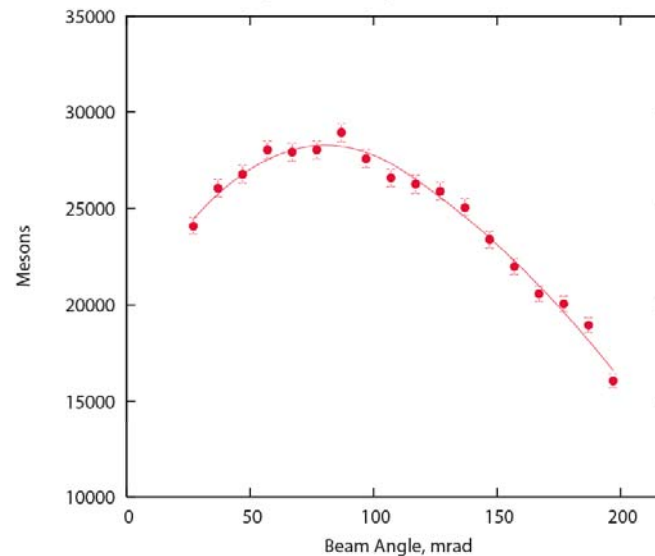

Vary the Crossing Angle (Peak at 18.2 mrad)

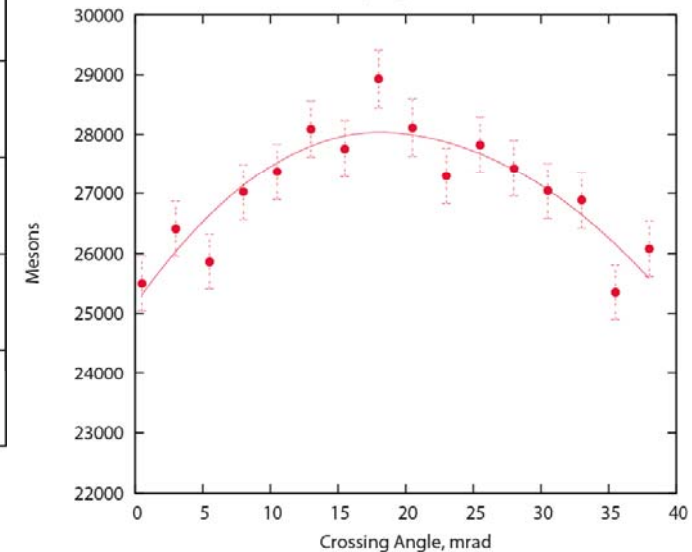

CERN MERIT Experiment (Nov 2007)

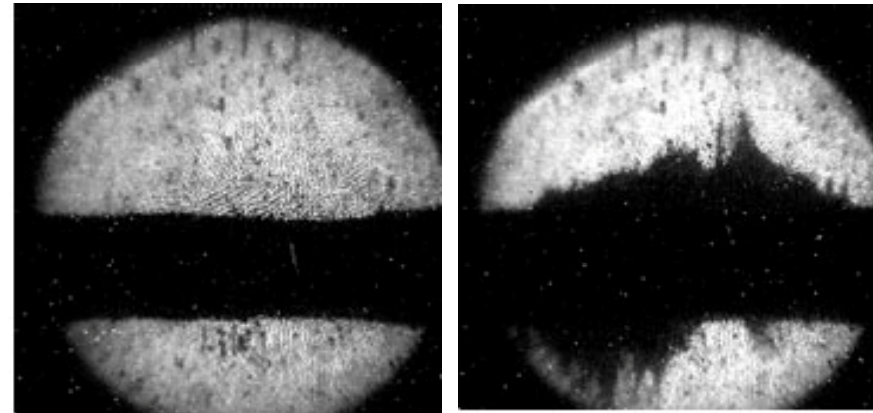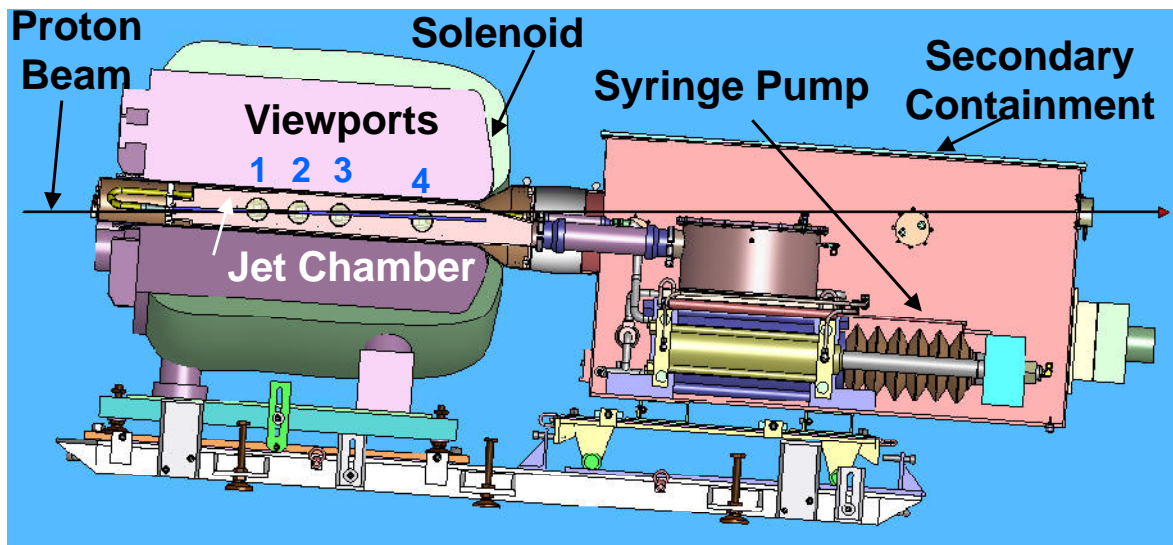

Proof-of-principle demonstration of a mercury jet target in a strong magnetic field, with proton bunches of intensity equivalent to a 4 MW beam.

Pion production remains nominal for several hundred μs after first proton bunch of a train.

Jet disruption suppressed (but not eliminated) by high magnetic field.

Region of disruption of the mercury jet is shorter than its overlap with the proton beam.

Filament velocity < 100 m/s.

The mercury jet showed a vertical growth to double its original height at 50 cm from the nozzle, largely independent of magnetic field.



Pump-Probe Data





? Is pion production reduced during later bunches due to disruption of the mercury jet by the earlier bunches?

At 14 GeV, the CERN PS could extract several bunches during one turn (pump), and then the remaining bunches at a later time (probe).

Pion production was monitored for both target-in and target-out events by a set of diamond diode detectors.

These detectors showed effects of rapid depletion of the charge stored on the detector electrodes, followed by a slow RC recovery of the charge/voltage.

The beam-current transformer data was used to correct for fluctuations in the number of protons per bunch.

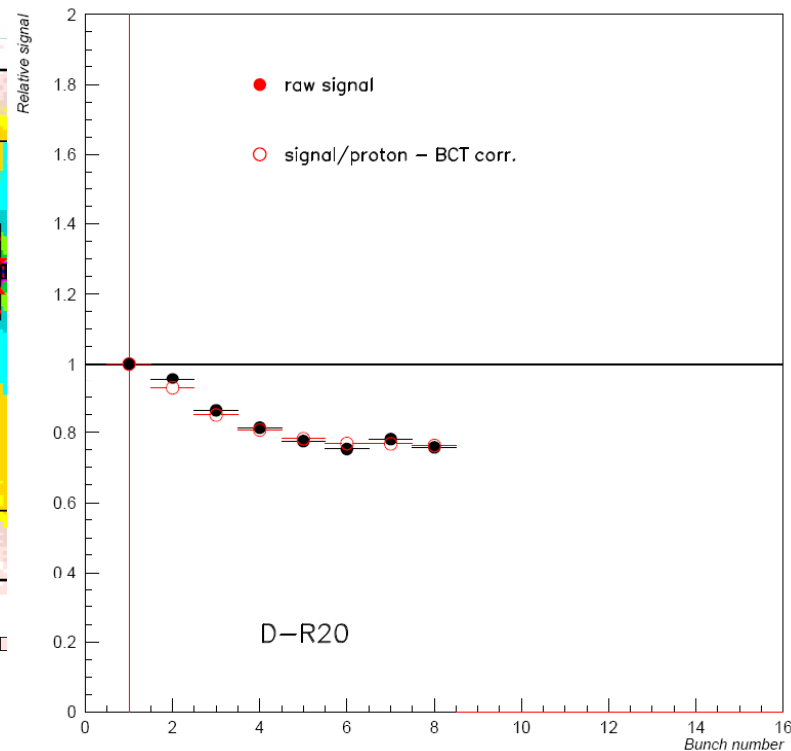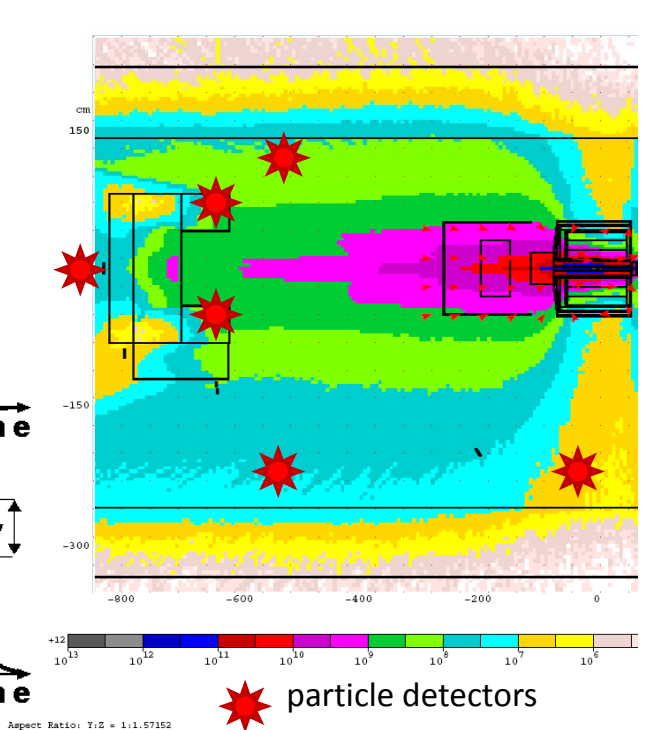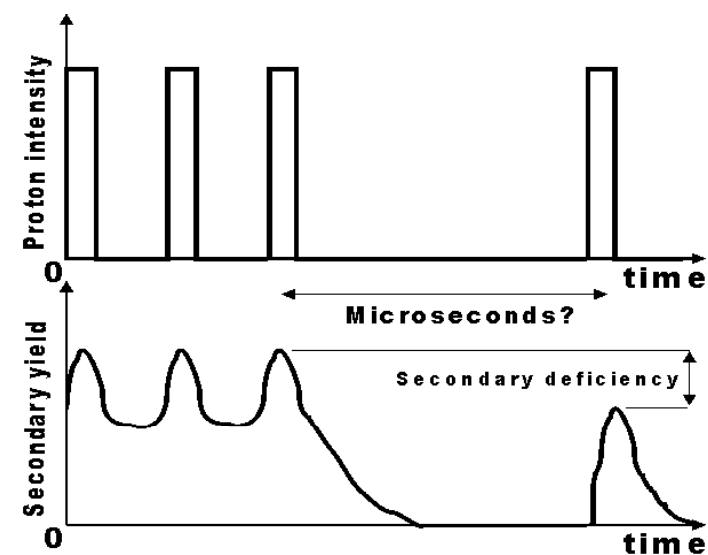

Beam-Current Transformer Corrections (A. Fabich)





The signal from the beam-current transformer "rang" for longer than the time between bunches.

A small baseline drift occurred over a full-turn extraction.

A correction to each bunch of a multibunch event was made using waveforms from single-bunch events.

The integral of the corrected signal was flat between the short steps, showing the drift and ringing have been well corrected.

Bunch (h16)

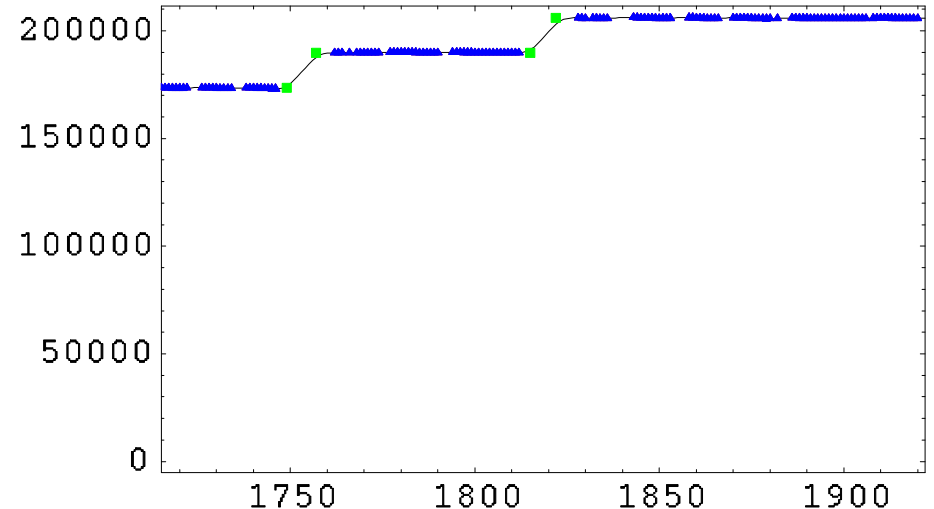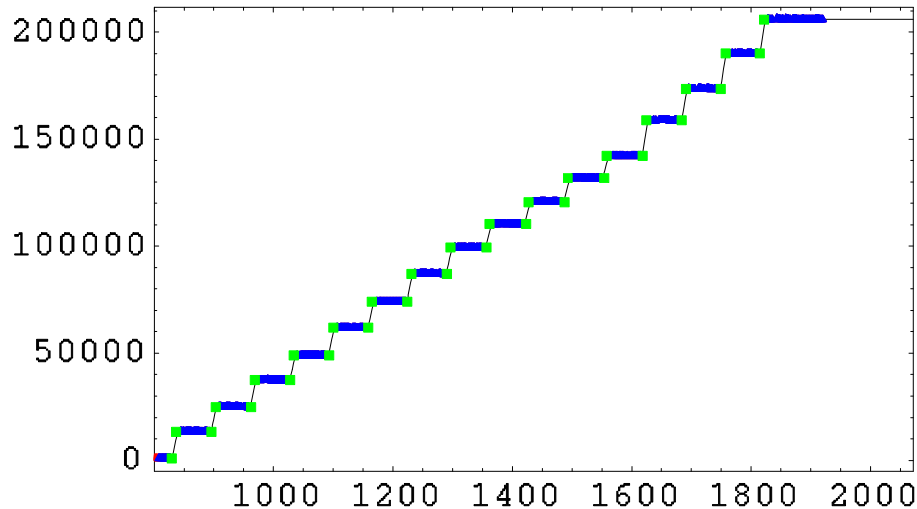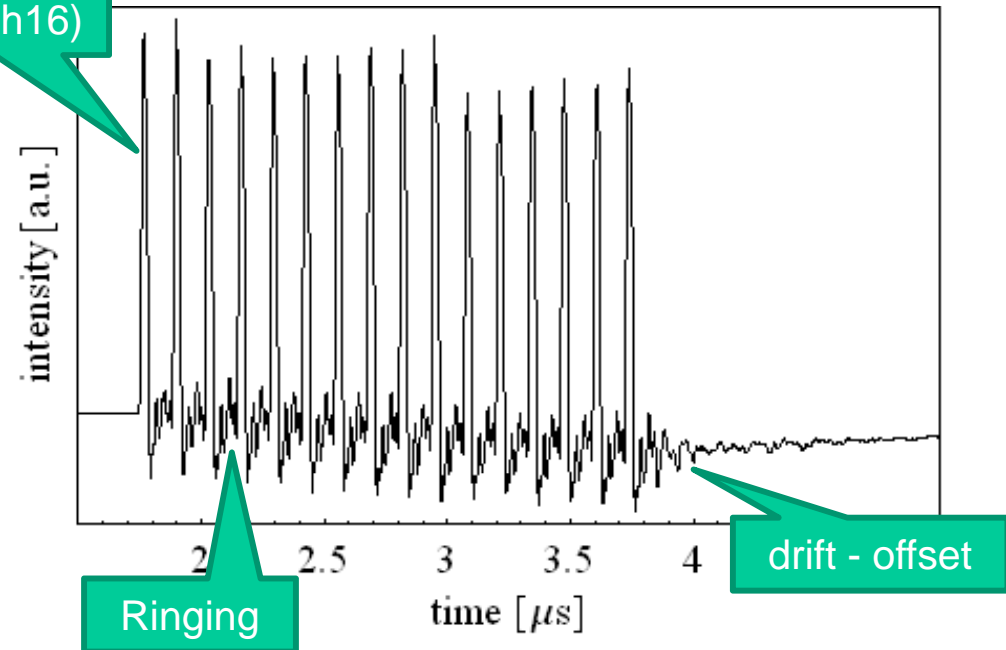


Preliminary Pump-Probe Data Analysis (I. Efthymiopoulos, H. Kirk)

Both target-in and target-out data showed smaller signals, relative to the pump bunches, for probe bunches delayed by 40, 350 and 700 μs .




Similar behavior seen in all 4 usable diamond detectors:

We therefore report a corrected probe/pump ratio:


$$\text{Ratio} = \frac{\frac{\text{Probe}_{\text{target in}} - \text{Probe}_{\text{target out}}}{\text{Pump}_{\text{target in}} - \text{Pump}_{\text{target out}}}}{\frac{\text{Probe}_{\text{target out}}}{\text{Pump}_{\text{target out}}}}$$

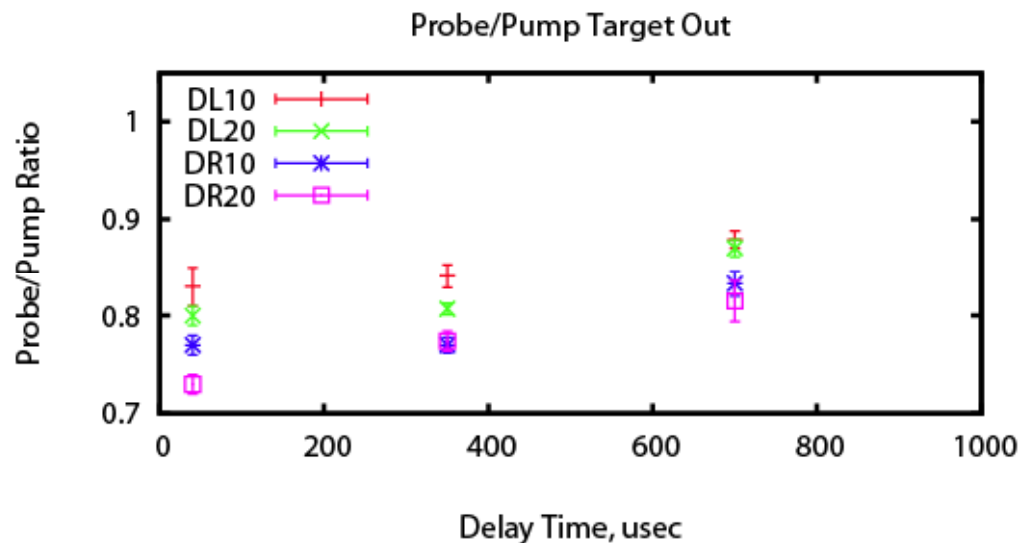

The preliminary results are consistent with no loss of pion production for bunch delays of 40 and 350 μs , and a 5% loss (2.5- σ effect) of pion production for bunches delayed by 700 μs .

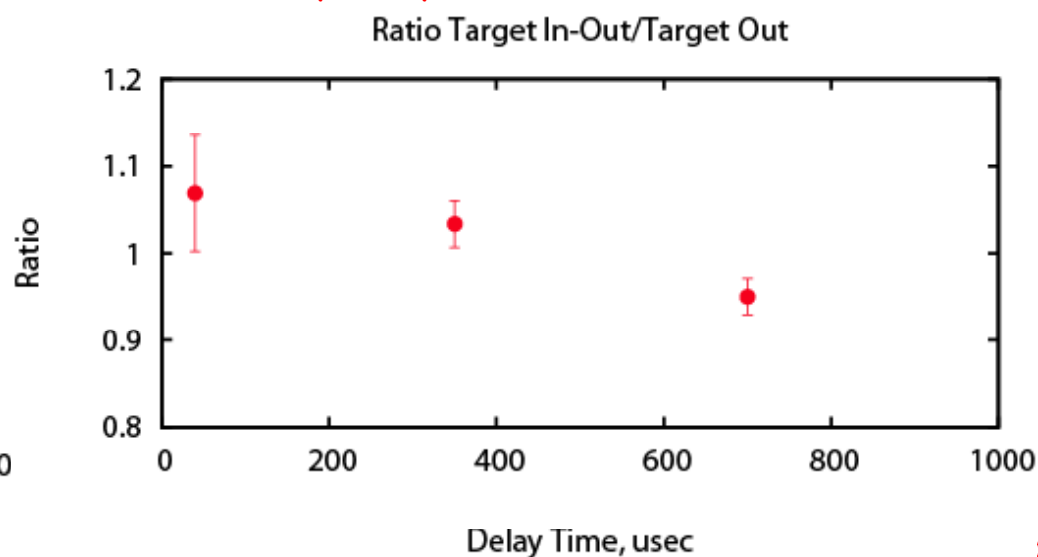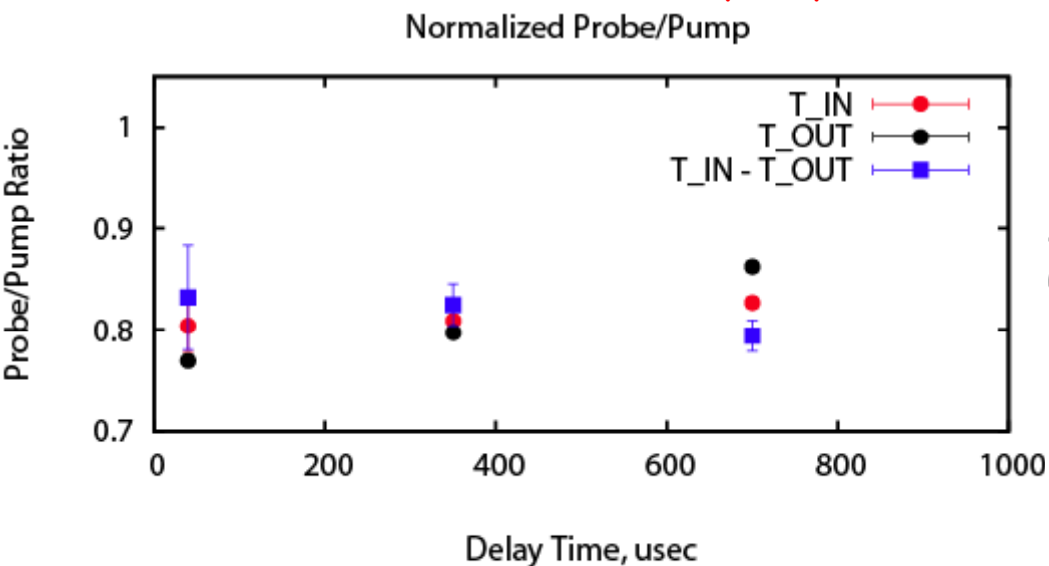


Optical Diagnostics of the Mercury Jet (T. Tsang)

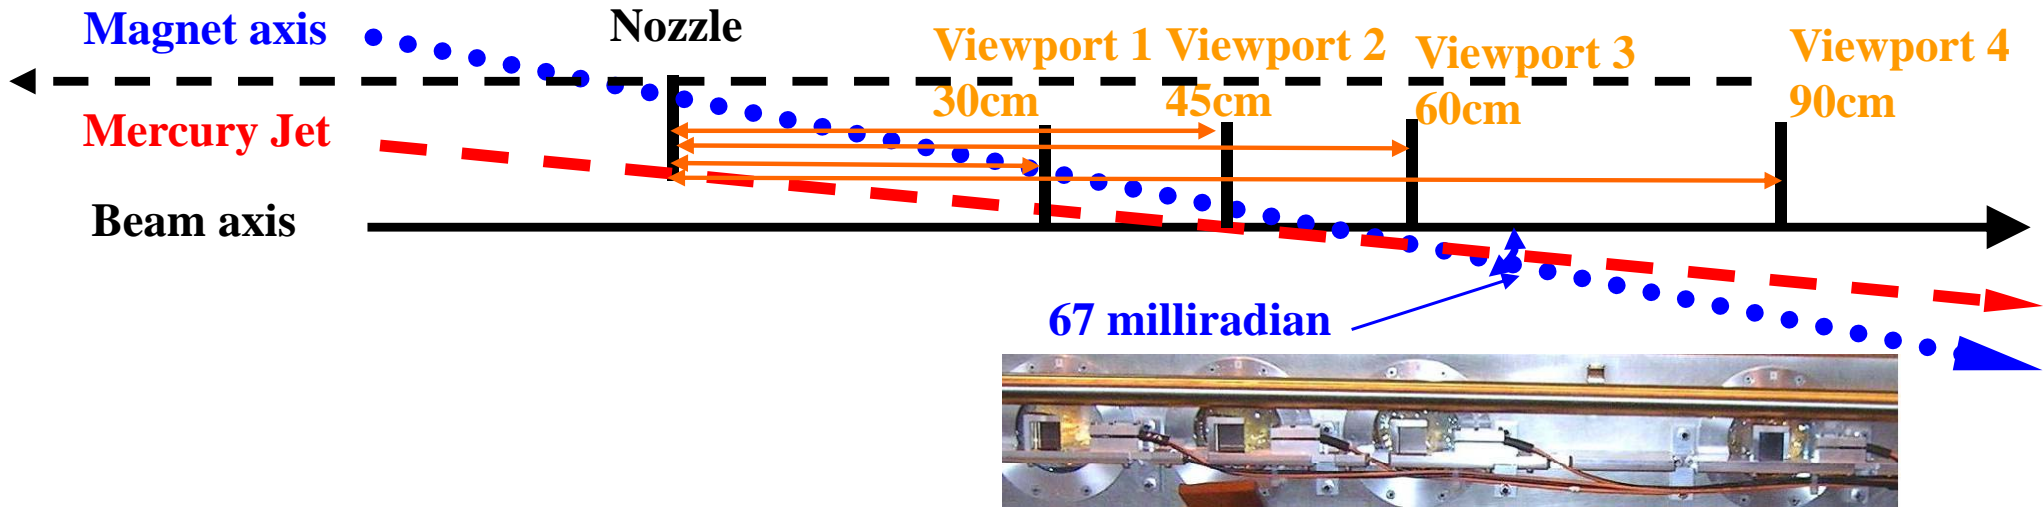

Viewport 1, FV Camera
6 μ s exposure
260x250 pixels







Viewport 2, SMD Camera
0.15 μ s exposure
245x252 pixels




Viewport 3, FV Camera
6 μ s exposure
260x250 pixels



Viewport 4, Olympus
33 μ s exposure
160x140 pixels

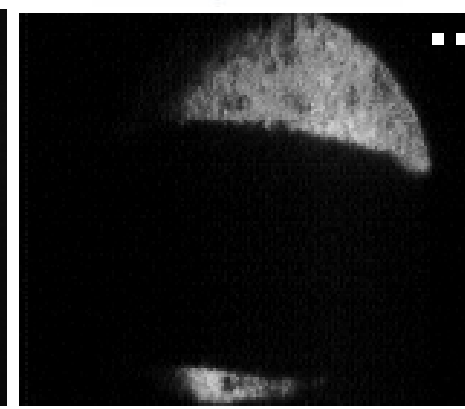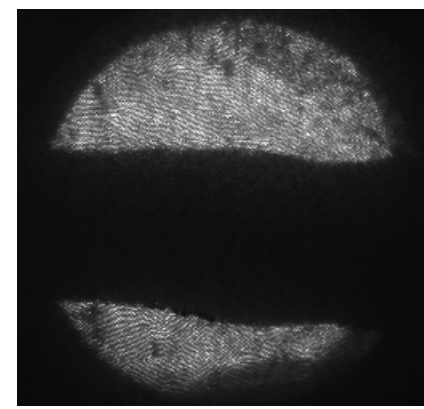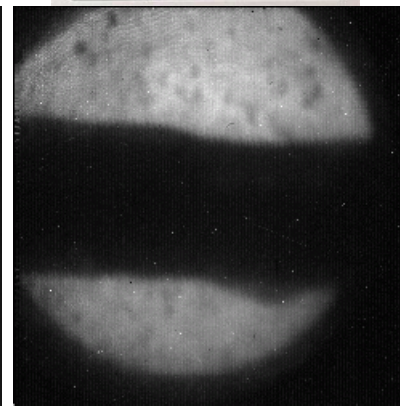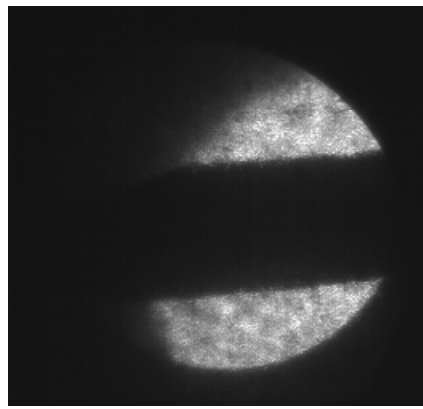


7 T,
no beam



Disruption Length Analysis (H. Park)

Observe jet at viewport 3 at 500 frames/sec to measure total length of disruption of the mercury jet by the proton beam.

Images of Jet Flow at Viewport 3, $B = 10$ T, $N = 10$ T_p , 2 ms/frame, $\Rightarrow L_{\text{disruption}} = 17$ cm.

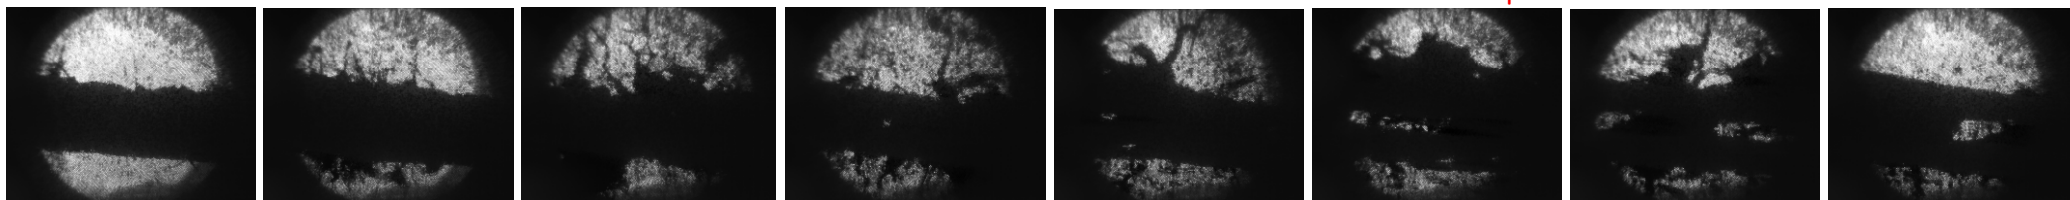



$t = 6,$ $8,$ $10,$ $12,$ $14,$ $16,$ $18,$ 20 ms

Disruption length never longer than region of overlap of jet with proton beam.

No disruption for pulses of < 2 T_p .

Disruption length smaller at higher magnetic field.


Model: disruption occurs wherever the energy deposition exceeds a minimum value (that depends on B).

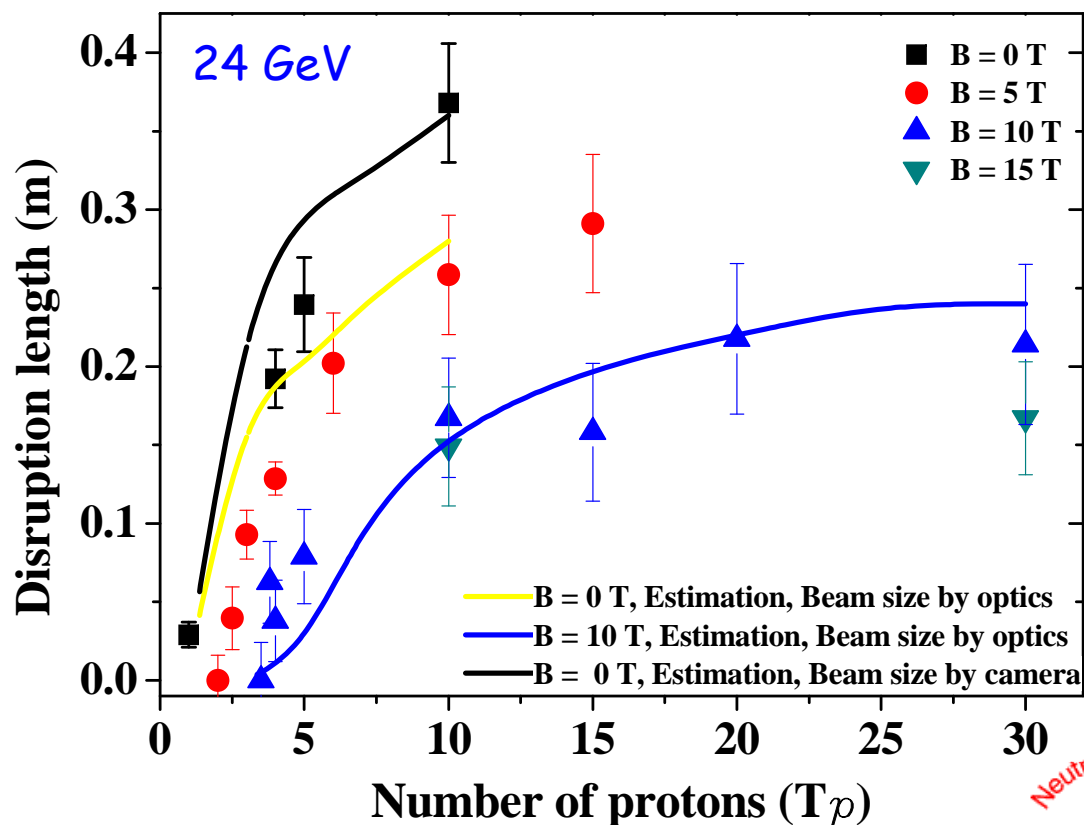




Filament Velocity Analysis (H. Park)

Study velocity of filaments of disrupted mercury using the highest-speed camera, at viewport 2, at frame periods of 25, 100 or 500 μs



Shot 11019: 24-GeV, 10-Tp Beam, 10-T Field, 25 μs /frame:

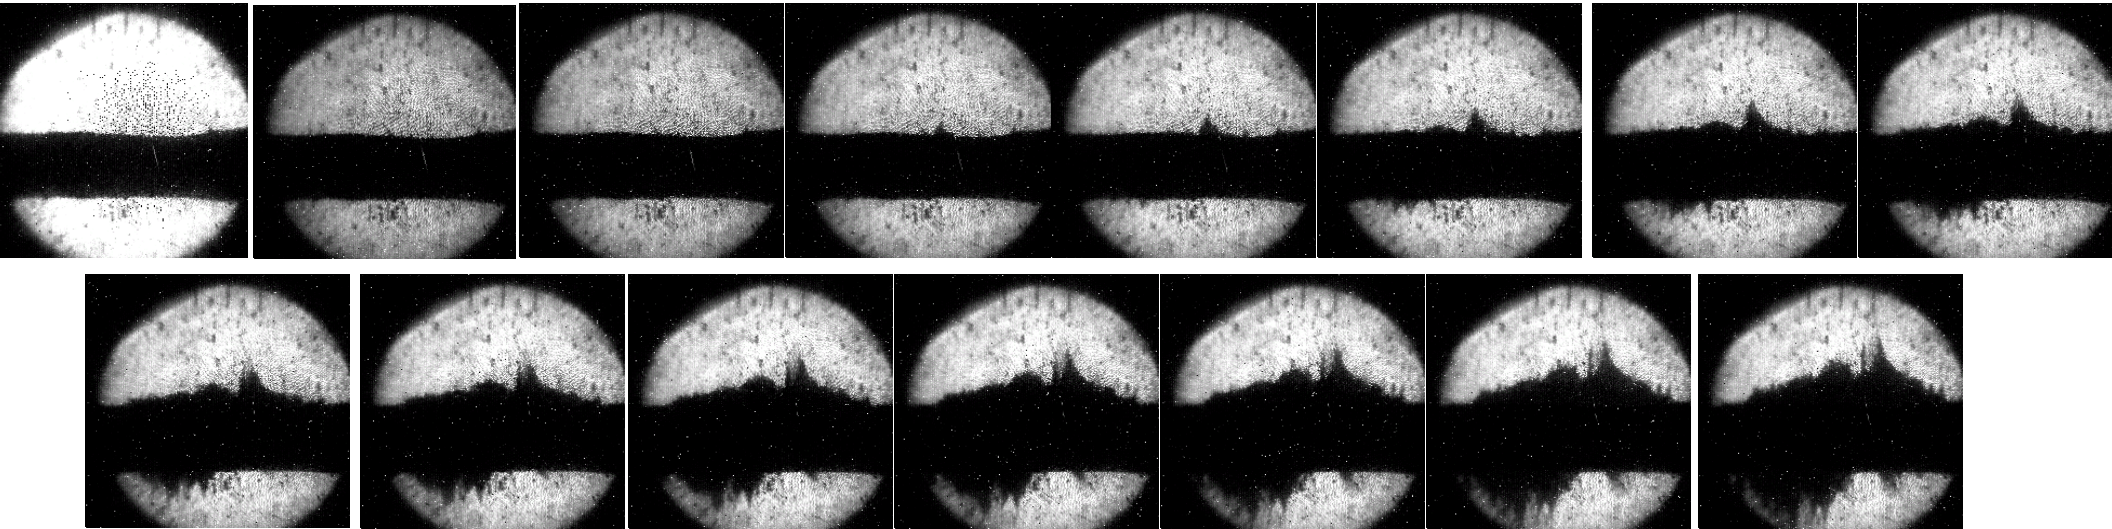

Measure position of tip of filament in each frame, and fit for t_v and v .

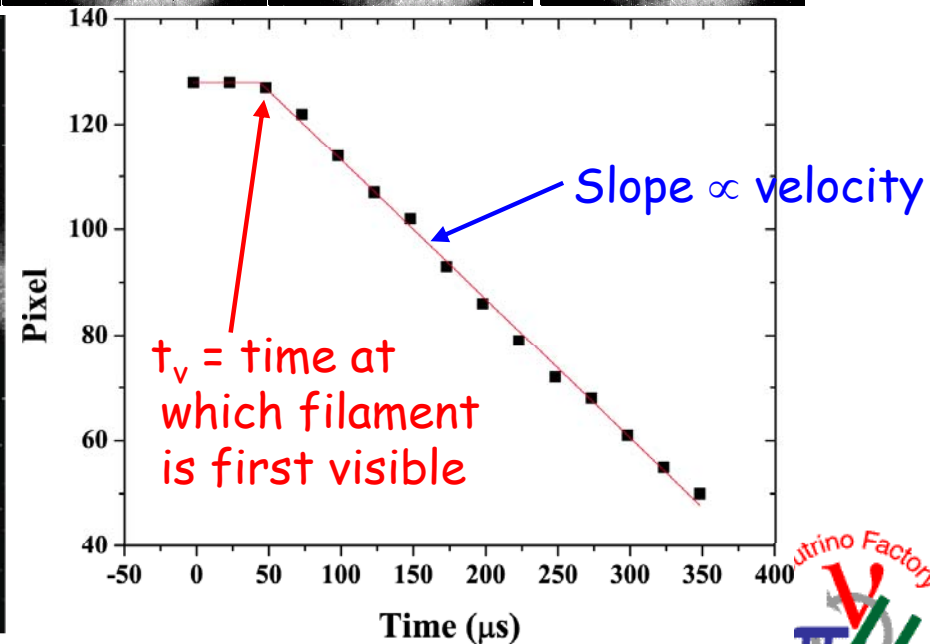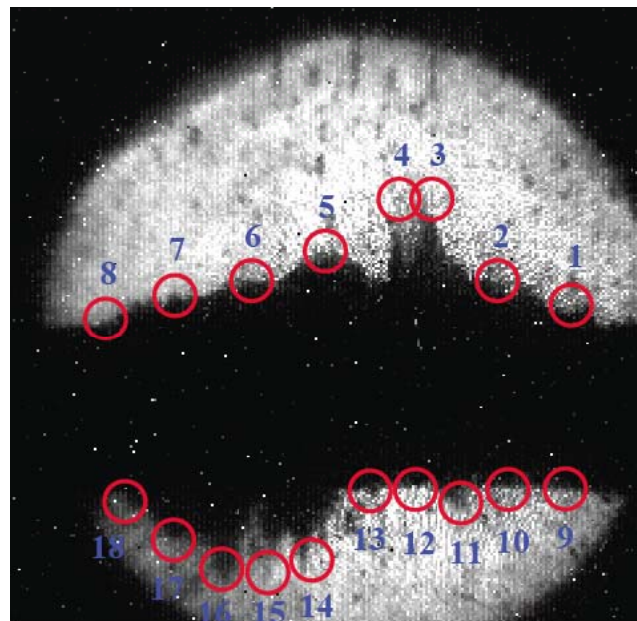


Shadow Photography \Rightarrow Observe Projection on Vertical Plane

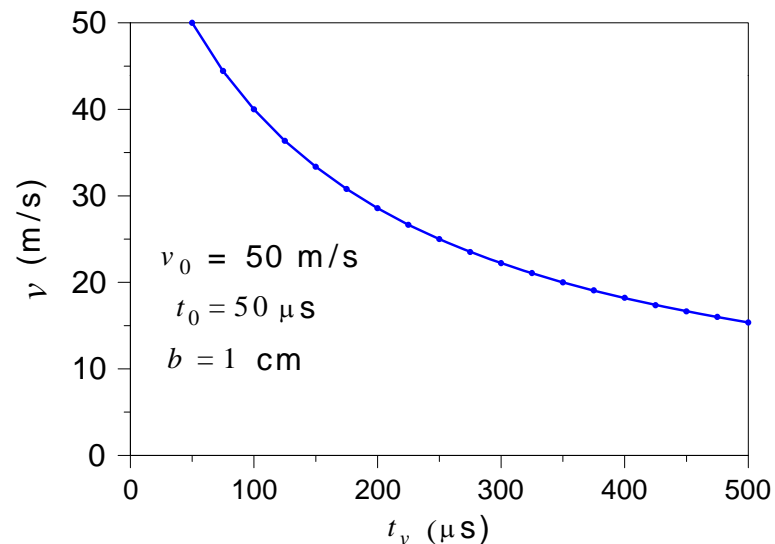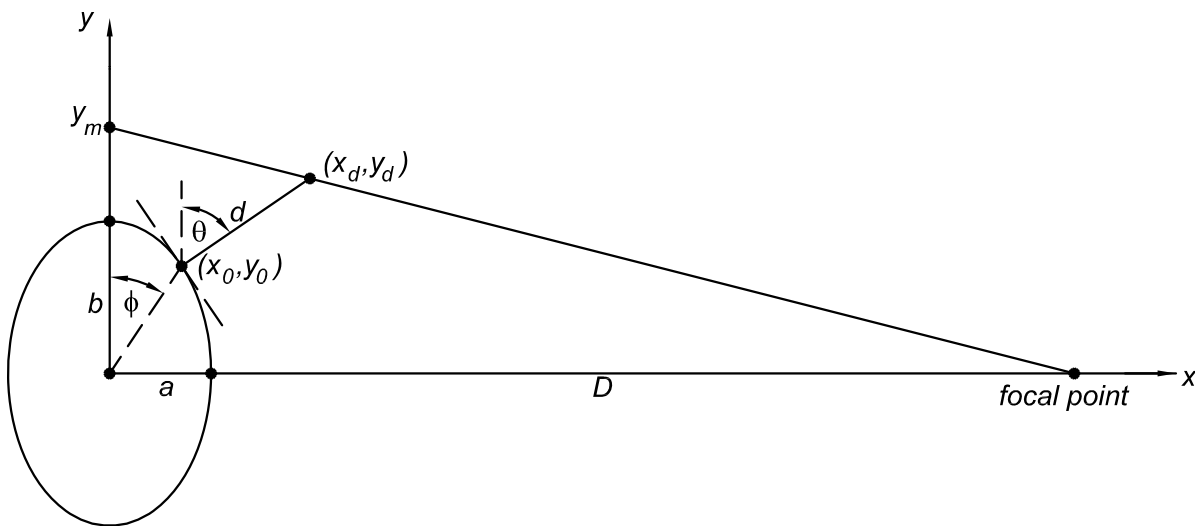


If all filaments had the same velocity v_0 and same starting time t_0 , but differing azimuthal angle ϕ , then observe filaments with larger start times t_v and smaller velocities v .

Data from shot 11019 are consistent with upwards filaments having $v_0 \sim 60$ m/s and $t_0 \sim 40$ μs , but downwards filaments may have started later, $t'_0 \sim 70$ -80 μs .

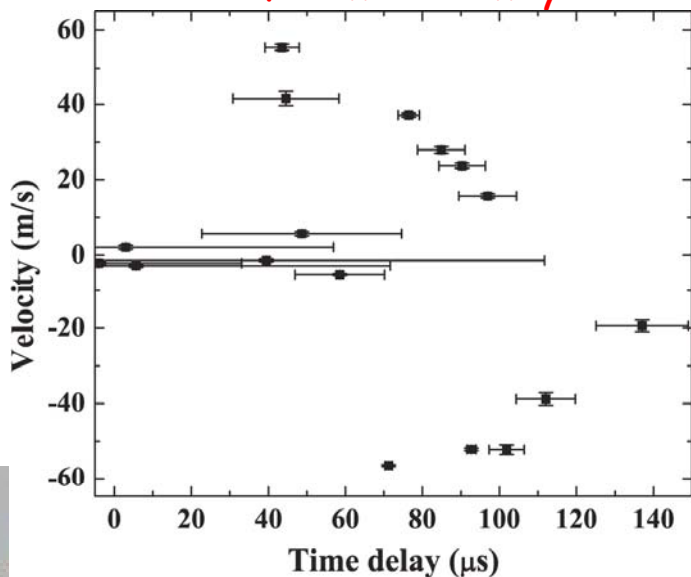

Challenge: use projected data to extract information as to the size a of the jet in the horizontal plane.








Filament Velocities and Start Times

For our projected data, take the characteristic filament velocity to be the largest velocity observed in a shot, and take the associated filament start time to be that of the largest velocity filament.

⇒ Filament velocity observed to be \sim linear in number of protons, and somewhat suppressed at higher magnetic fields.

Filament start time is typically much longer than $2 \mu\text{s}$ = transit time of sound (pressure) wave across the jet.

The start time depends on number of protons, and on magnetic field, but more study needed.

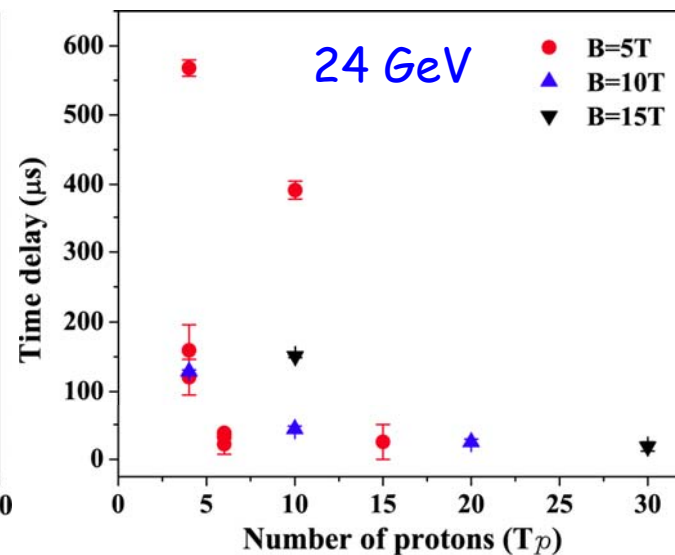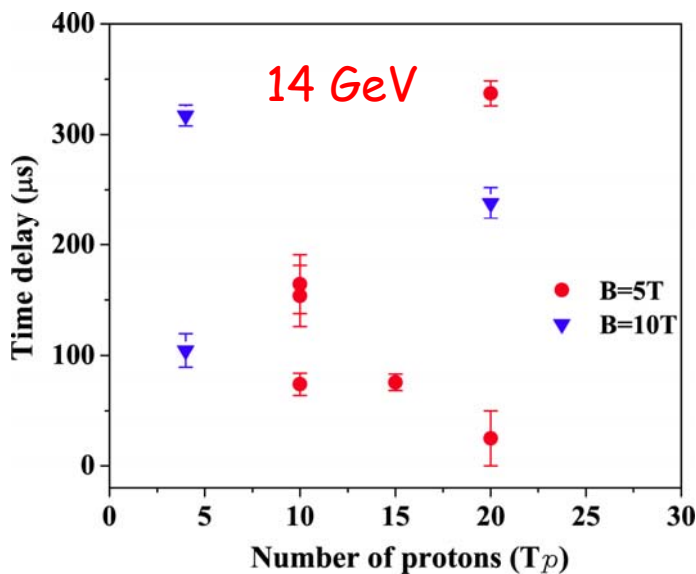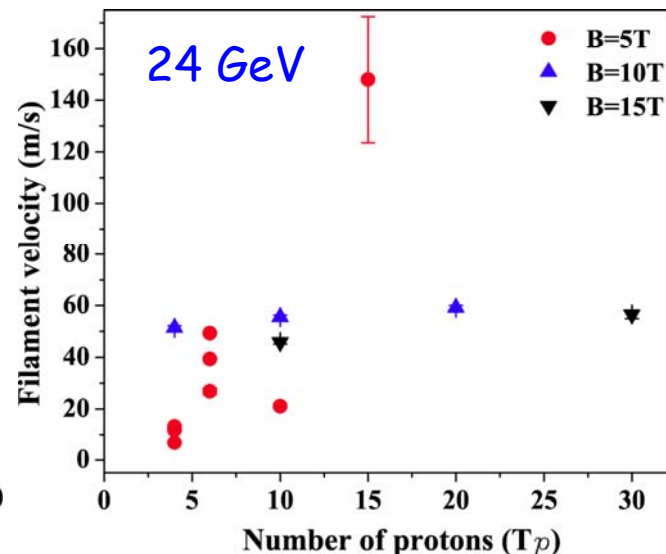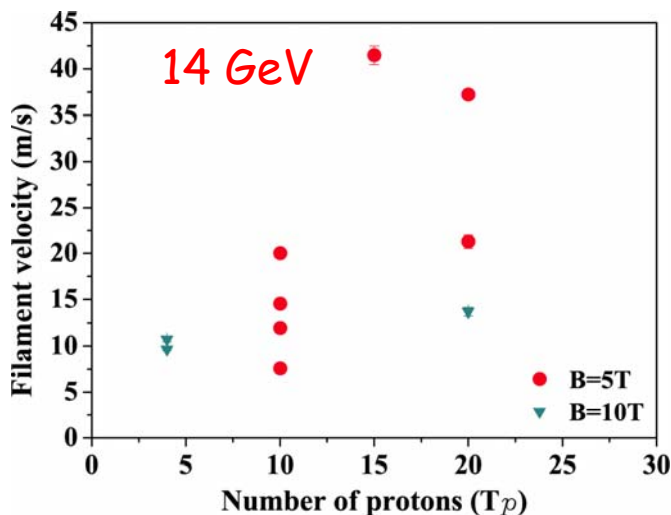




Jet Velocity Issues (with Magnet but without Beam)

The velocity of surface perturbations on the jet was measured at all 4 viewports to be about 14 m/s, independent of magnetic field.

The vertical height of the jet grew \sim linearly with position to \sim double its initial value of 1 cm after 60 cm, almost independent of magnetic field.


Did the jet stay round, but have reduced density (a spray)?,

Or did the jet deform into an elliptical cross section while remaining at nominal density?

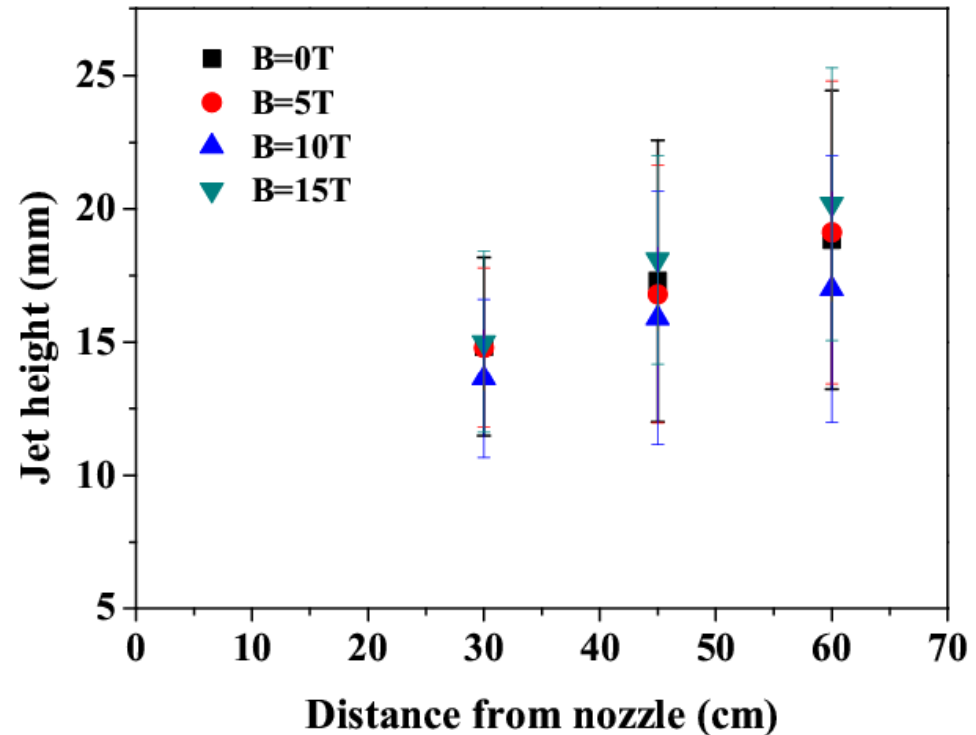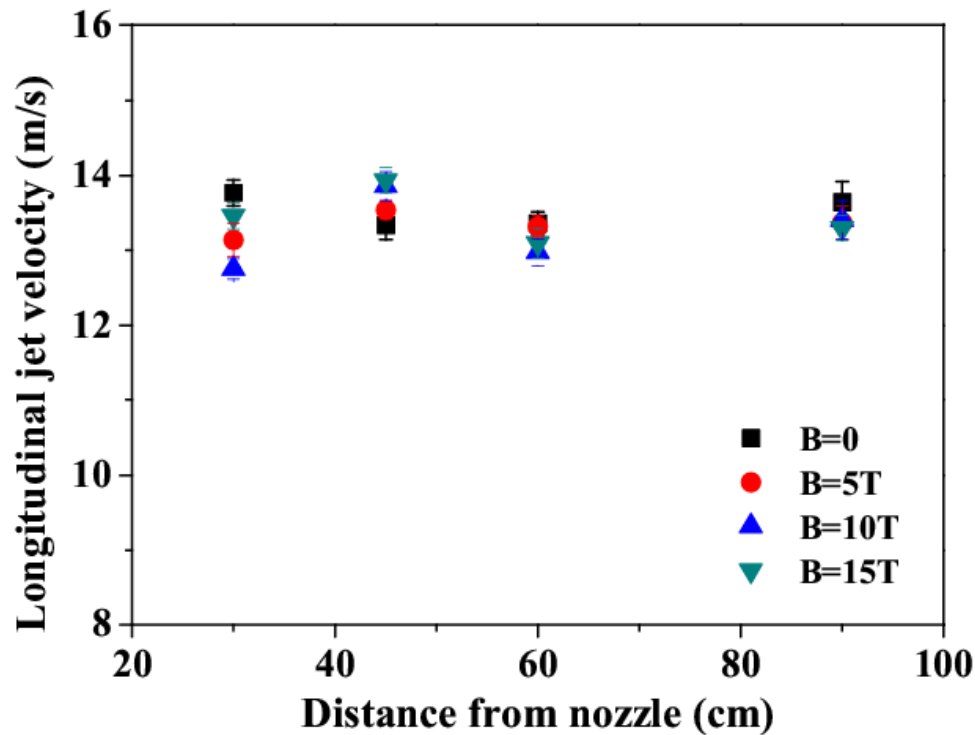



R&D Issues for Hg Jet Target Option

- Continue and extend simulations of mercury flow in and out of the nozzle.
 - Can we understand/mitigate the observed transverse growth of the jet out of the nozzle, which was largely independent of magnetic field.
- Examine the MERIT primary containment vessel for pitting by mercury droplets ejected from the jet by the proton beam.
- Extend the engineering study of a mercury loop + 20-T capture magnet, begun in v Factory Study 2, in the context of the International Design Study.
 - Splash mitigation in the mercury beam dump,
 - Possible drain of mercury out upstream end of magnets.
 - Downstream beam window
 - Water-cooled tungsten-carbide shield of superconducting magnets.
 - High-TC fabrication of the superconducting magnets.
- Hardware prototype of a continuous mercury jet with improved nozzle.





Mercury Pool Issues

Both the jet and the proton beam will disrupt the mercury pool (T. Davenne)

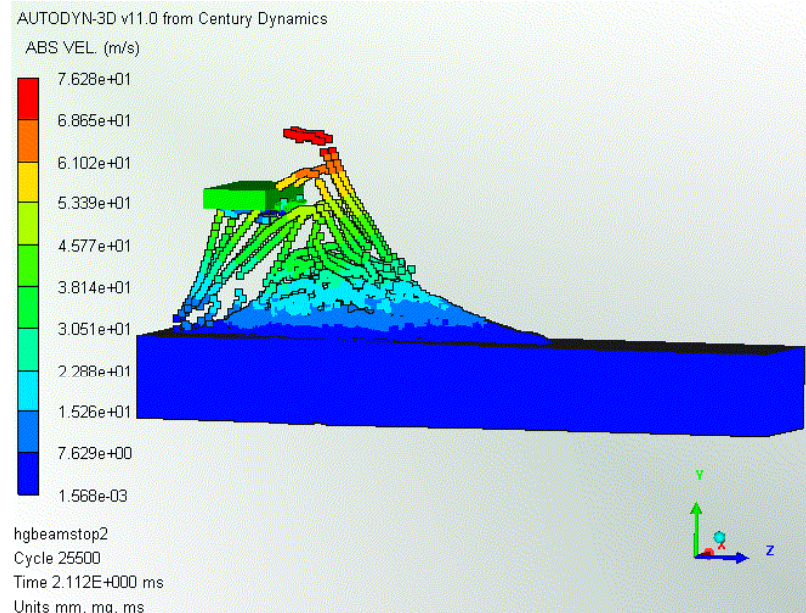
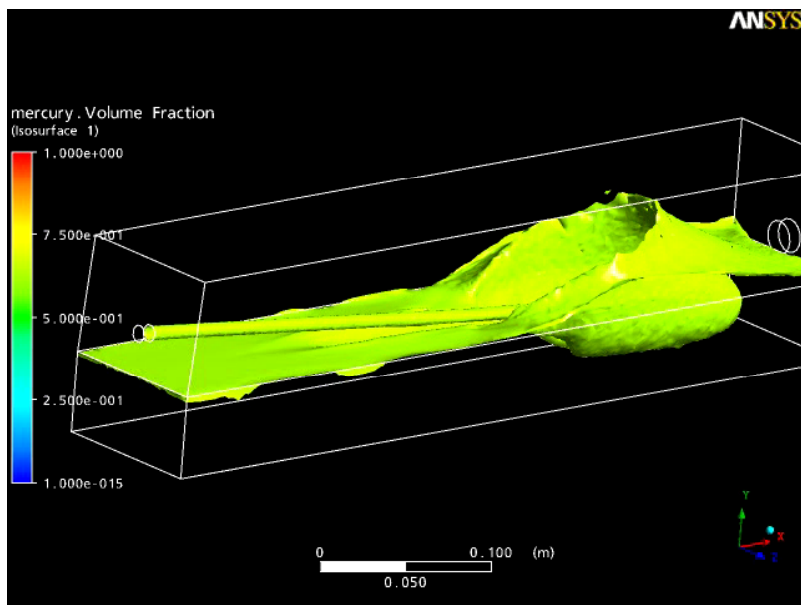


⇒ Need splash mitigation
(V. Graves)

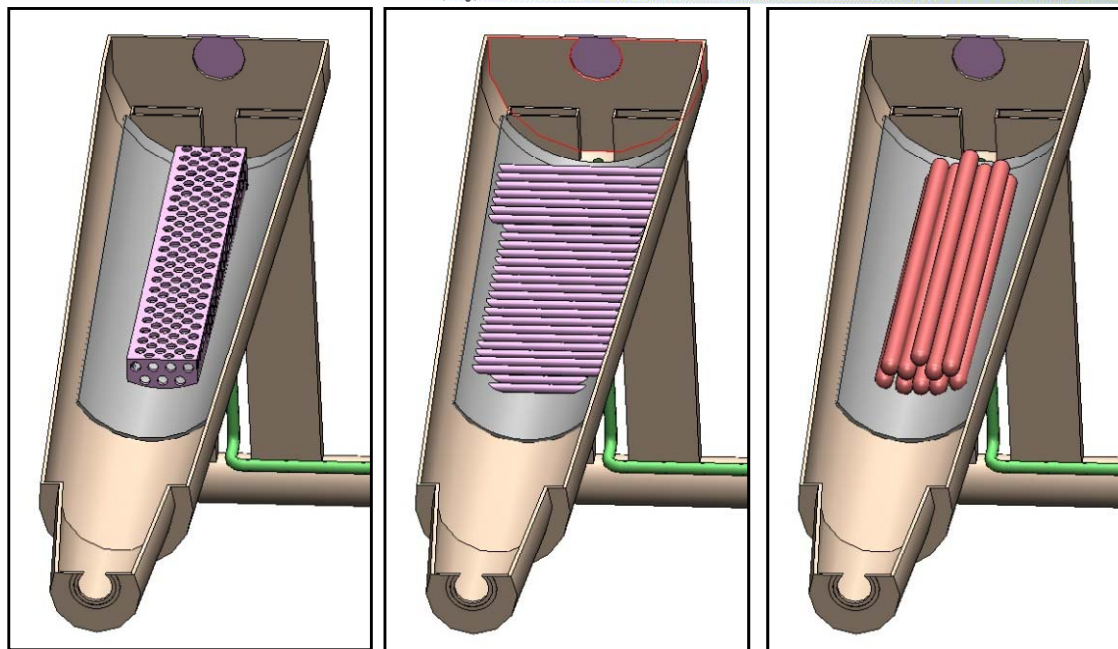

Mercury Drain, Downstream Beam Window

Mercury drain at downstream end of containment vessel is awkward - and may interfere with the pion-beam window.

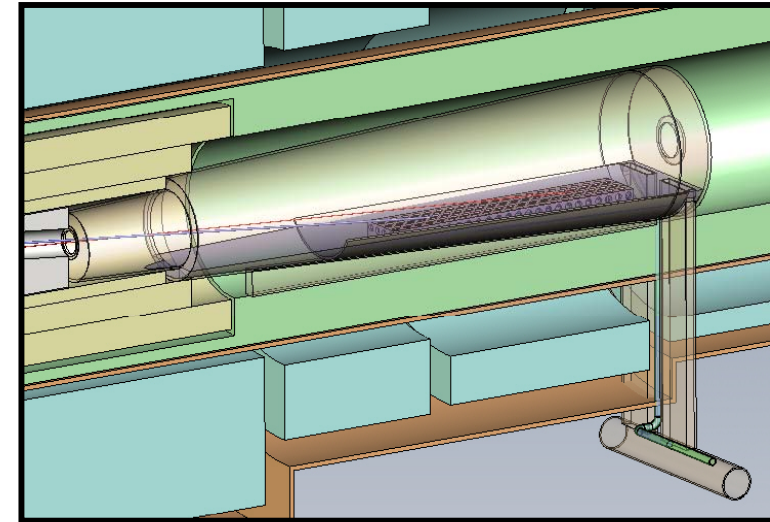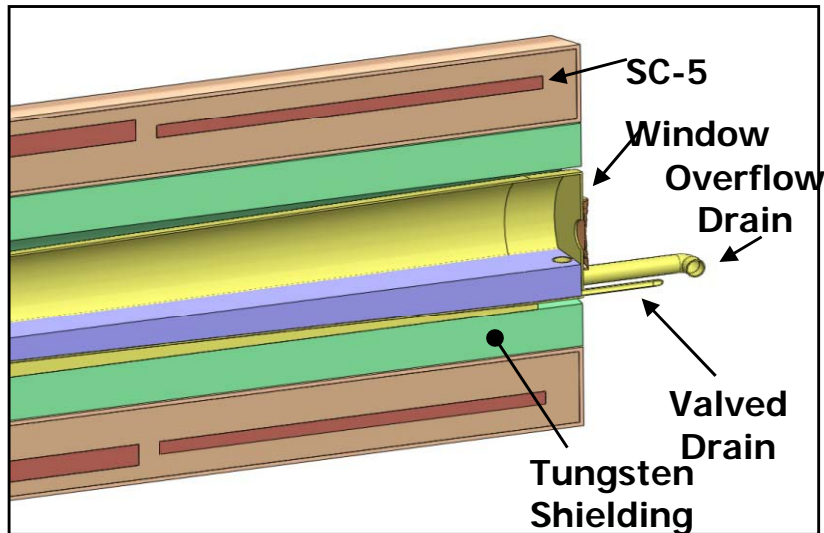

⇒ May be better to drain mercury between the resistive magnets and SC1.

